



PLAN

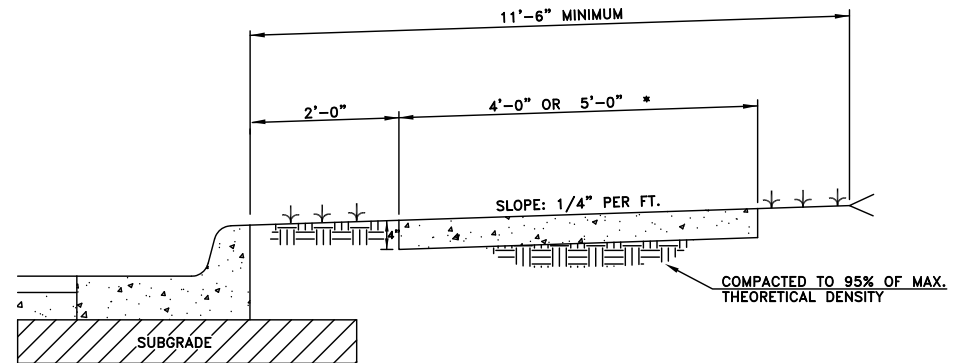

TYPICAL SECTION OF SIDEWALK

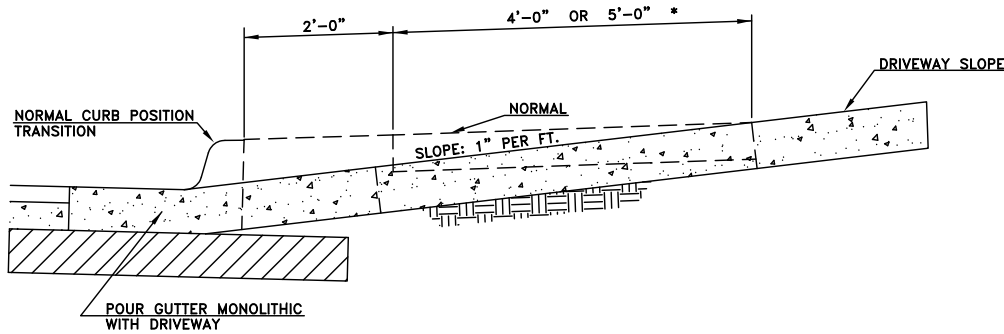

SIDEWALK SECTION AT DRIVEWAY

NOTES:

- 1) SIDEWALK TO BE CONSTRUCTED OF 3000 PSI CONCRETE AT 28 DAYS.
- 2) SIDEWALK TO BE 4 INCHES (4") THICK.
- 3) 1/2" PREMOULDED EXPANSION JOINT REQUIRED AT ALL DRIVEWAYS, CURBS, ETC.

- * 4'-0" INTERNAL ROADS (LOCAL STREET)
- 5'-0" EXTERNAL ROADS (PRINCIPAL , MAJOR OR MINOR ARTERIAL ; MAJOR OR MINOR COLLECTOR)



GWINNETT COUNTY
DEPARTMENT OF PLANNING & DEVELOPMENT
STANDARD DRAWING

Typical Sidewalk Section

DATE: DECEMBER 2015

SHEET: 315