

November 07, 2025

ADDENDUM #1**BL013-26****Purchase and Installation of Blowers at Shoal Creek Filter Plant**

The following addition/changes modify the Bid No. BL013-26 "Purchase and Installation of Blowers at Shoal Creek Filter Plant" Contract Documents, dated November 2025, as first advertised on November 05, 2025.

I. Questions:

Q1. Page 2 of BL013-26 shows the scope equipment is 2 blowers, 2 motors, instrumentation and check valves, flex connectors... So would the supplier only be supplying parts, and not new blower packages? What is the "instrumentation" required?

A1. This solicitation is for provision of parts and installation. Please see Spec 43 11 33 2.03 G-I for description of instruments and placement. Please see Spec 11276-B 1.7 for listed manufacturers, model numbers, operating range and quantity.

Q2. What does Gwinnett County define as a "motor assembly"?

A2. Motor defined by specification seciton 16150, and including the ancillary components listed in 11276-B 1.8.

Q3. If suppliers are to be replacing existing Roots 1016 RAS-J blowers, please provide a picture of the nameplate to quote an exact duplicate.


A3. Please see existing blower nameplate photos below.

Photo 1 of 2: (Existing Blowers- Nameplate) Typical of 2




Photo 2 of 2: (Existing Blowers- Nameplate) Typical of 2

Model: 1016 Roots J
Ser. No.: 439802
Load: 8.5 PSI
CFM: 3010
See Spec. 11276-B for
additional information about
the existing Blower Model in
operation currently

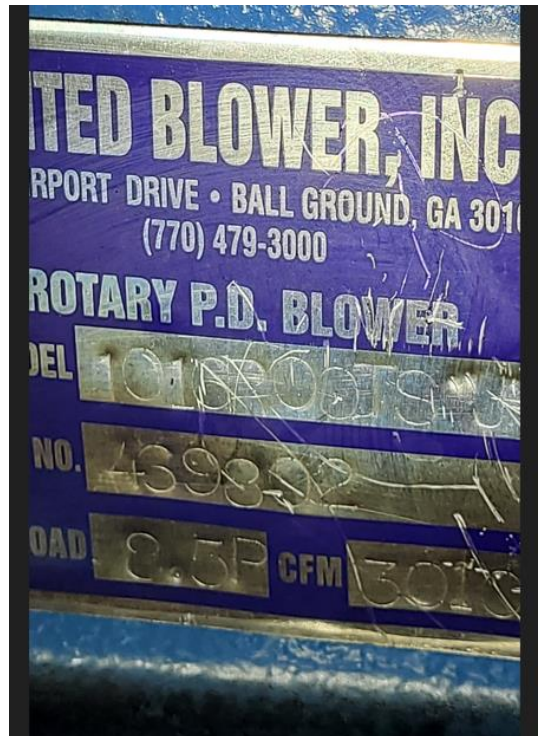

- Q4. If suppliers are to be quoting replacement motors, please provide a nameplate picture to try to duplicate a suitable replacement.**
- A4.** New motors to be matched to the blower provided in this procurment package. Please see existignt blower nameplate photo below..

Photo 1 of 1: (Existing Motors -Nameplate) Typical of 2

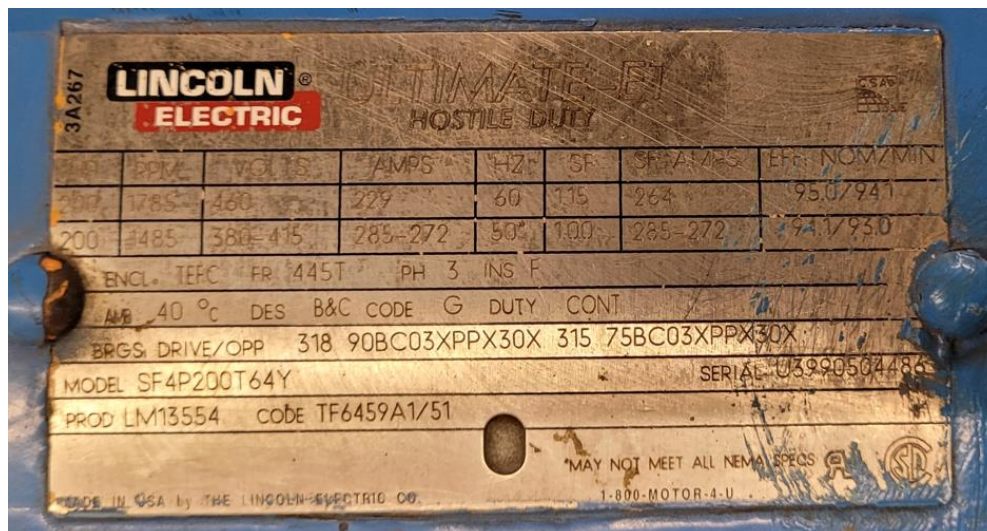

Q5. It looks like Gwinnett County needs 10" and 12" EPDM expansion joints. Please provide the length of each to make sure they fit?

A5. Length and Bolt Pattern will depend upon the blower provided. Existing expansion joints are listed by size and model number in specification section 11276-B 1.5 and 1.7.

Q6. It looks like Gwinnett County has 5V sheaves. Please provide the diameter and number of grooves for both the motor and blower sheaves? These need to be an exact match of the existing sheaves.

A6. Bidder to coordinate sheave types and sizes with specifications provided. Current sheaves are as follows:

Motor:

of Grooves: 6

Diameter of sheave: 12"

Width of Sheave 4.43"

Blower:

of Grooves: 6

Diameter of Sheave: 14"

Width of Sheave: 4.43"

Belts:

Quantity (per blower): 6

Current Mfg: Unknown

Mfg/Size/Part # to be determined at installation.

Specification Section 11276-B 1.7c to be amended as follows:

c. Drive Belt

i. Quantity: 4 6 per skid, 2 12 total.

ii. Maska 5VX System (Coordinate with Sheaves)

iii. Or Owner Approved Equal.

Q7. What is the belt length of the 5VX belts? This is dependent on the blower and motor mounted on the skid, so there is no way of estimating.

A7. Necessary belt length will be determined at the time of installation.

Q8. Spec SECTION 43 11 33-A (pages 24-31) makes it seem like complete blower packages are to be supplied, but section 11276-B (pages 32-50) makes it look like only the blowers, motors, motor bases, expansion joints, sheaves, belts, vacuum gauges, pressure gauges, discharge temp gauges, an oil level sightglass/water separator, and spare parts are to be provided. Please clarify.

A8. Specification Section "11276-B Blowers Specific Requirements" describes components specific to this procurement package scope of work. Specification Section 43 11 33-A describes the overall assembly that the scoped components operate within. It is not the intent of this procurement package to purchase complete blower packages, but rather components to service the blower packages we have in place currently.

Q9. Are bidding parties required to be licensed contractors or could they be businesses with the required insurance?

A9. All General Contractors must have a current valid license from the State Licensing Board for Residential and General Contractors, unless specifically exempted from holding such license pursuant to Georgia law (O.C.G.A. §43-41-17).

This addendum should be signed in the space provided below and returned with your quote. Failure to do so may result in your quote being deemed non-responsive.

Thank you,
Brittany Bryant, CPPB
Purchasing Associate III

Company Name _____

Authorized Representative_____