



April 3, 2026

Addendum No. 1

BL060-26

Project No.: F01520.1 SR 20/Buford Drive (Tech Center Pkwy - I 85 SB) & (Rock Springs Rd - Brand Smart Way)

**THE FOLLOWING CHANGES WERE MADE TO THE BID SCHEDULE:**

1. ITEM 165 621-6002 CONCRETE BARRIER, TP S-2 LF 661 CHANGED TO ITEM 165 621-6200 CONCRETE SIDE BARRIER, TP 2-S, LF 661
2. ITEM 430 636-1041 HIGHWAY SIGNS, TP 2 MATL, REFL SHEETING, TP 9 LF 184 CHANGED TO ITEM 430 636-1041 HIGHWAY SIGNS, TP 2 MATL, REFL SHEETING, TP 9, LF 249

**FOR THE CONTRACTORS' INFORMATION:**

Q1. I would like to request clarification regarding line-Item No. 130: CONC SIDEWALK, 8 IN TK – 324 SY. Could you please clarify the what station number associated with this particular item?

R1. 8 Inch thickness in curb return radii and wheelchair ramps.

Q2. Per the contract drawings, the concrete barrier wall is designed as Type S-2. However, field conditions and the existing grading indicate that the elevation difference from the face of barrier to adjacent grade exceeds 1 foot, which meets the criteria for a Type S-3. Please confirm the correct barrier wall type to be used for bidding and construction. Additionally, advise if any revisions to the plans or details will be issued to reflect this condition.

R2. The pay item on the detail estimate for the wall shows 621-6002 Concrete Barrier, Type S-2, which is a pay item for a S-2 median barrier. The plans show a Type 2-S Side Barrier (using GA Std 4949B), which required pay item 621-6200 Concrete Side Barrier, TP 2-S, LF.

Q3. Will this project utilize the GDOT Asphalt Cement Index for the Paving?

R3. Index will be applied per the current GDOT Specification.

**ATTACHMENTS:**

- Revised Plan Sheets (*updated overhead signs*) – 10 Sheets
- Revised Bid Schedule – Pages: 1-9

You should acknowledge receipt on Page I-4 of the bidding documents.

**FAILURE TO ACKNOWLEDGE THE ADDENDUM MAY RESULT IN REJECTION OF YOUR BID.**

**RECEIPT OF BIDS REMAINS UNCHANGED: 2:50 PM LOCAL TIME, THURSDAY, April 9, 2026.**

<b>GWINNETT COUNTY, GEORGIA</b>	
PROJECT #:	F01520.1
PROJECT:	SR 20 / BUFORD DRIVE (FROM TECH CENTER PKWY TO I-85 SB EXIT RAMP TERMINAL) & SR 20 / BUFORD DRIVE (FROM ROCK SPRINGS ROAD TO BRAND SMART WAY)
BID NUMBER:	BL060-26

**ADDENDUM NO. 1**  
**(Revised Bid Schedule)**

**BID SCHEDULE**

Item #	GDOT #	Description	Units	Est. Bid Quantity	Unit Price Bid	Total Price Bid
005	009-3100	AERIAL PHOTOGRAPH DOCUMENTATION	MO	10		

010	150-1000A	TRAFFIC CONTROL - PROJECT NO.: F01520.1 SR 20 / BUFORD DR (FROM TECH CENTER PKWY TO I-85 SB EXIT RAMP TERMINAL)	LS	1		
-----	-----------	---	----	---	--	--

015	150-1000B	TRAFFIC CONTROL - PROJECT NO.: F01520.1 SR 20 / BUFORD DR (FROM ROCK SPRINGS ROAD TO BRAND SMART WAY)	LS	1		
-----	-----------	---	----	---	--	--

**TEMPORARY EROSION CONTROL ITEMS**

020	161-1000A	EROSION CONTROL - PROJECT NO.: F01520.1 SR 20 / BUFORD DR (FROM TECH CENTER PKWY TO I-85 SB EXIT RAMP TERMINAL)	LS	1		
-----	-----------	---	----	---	--	--

025	161-1000B	EROSION CONTROL - PROJECT NO.: F01520.1 SR 20 / BUFORD DR (FROM ROCK SPRINGS ROAD TO BRAND SMART WAY)	LS	1		
-----	-----------	---	----	---	--	--

030	163-0508	CONSTRUCT, MAINTAIN & REMOVE SILT CONTROL GATE, TP 2	EA	1		
-----	----------	--	----	---	--	--

035	163-0538	CONSTRUCT, MAINTAIN & REMOVE CHECK DAM	EA	36		
-----	----------	--	----	----	--	--

040	163-0551	CONSTRUCT, MAINTAIN & REMOVE INLET SEDIMENT TRAP	EA	56		
-----	----------	--	----	----	--	--

045	163-0561	CONSTRUCT, MAINTAIN & REMOVE ROCK FILTER DAM	EA	1		
-----	----------	--	----	---	--	--

050	163-0562	CONSTRUCT, MAINTAIN & REMOVE STONE FILTER RING	EA	3		
-----	----------	--	----	---	--	--

055	171-0030	TEMPORARY SILT FENCE, TYPE C	LF	6,850		
-----	----------	------------------------------	----	-------	--	--

**ROADWAY ITEMS**

060	207-0203	FOUND BK FILL MATL, TP II	CY	150		
-----	----------	---------------------------	----	-----	--	--

065	210-0100A	GRADING COMPLETE - PROJECT NO.: F01520.1 SR 20 / BUFORD DR (FROM TECH CENTER PKWY TO I-85 SB EXIT RAMP TERMINAL)	LS	1		
-----	-----------	--	----	---	--	--

070	210-0100B	GRADING COMPLETE - PROJECT NO.: F01520.1 SR 20 / BUFORD DR (FROM ROCK SPRINGS ROAD TO BRAND SMART WAY)	LS	1		
-----	-----------	--	----	---	--	--

COMPANY NAME: \_\_\_\_\_  
Failure to return this page my result in rejection of bid.

<b>GWINNETT COUNTY, GEORGIA</b>	
PROJECT #:	F01520.1
PROJECT:	SR 20 / BUFORD DRIVE (FROM TECH CENTER PKWY TO I-85 SB EXIT RAMP TERMINAL) & SR 20 / BUFORD DRIVE (FROM ROCK SPRINGS ROAD TO BRAND SMART WAY)
BID NUMBER:	BL060-26

**ADDENDUM NO. 1**  
**(Revised Bid Schedule)**

**BID SCHEDULE**

Item #	GDOT #	Description	Units	Est. Bid Quantity	Unit Price Bid	Total Price Bid
075	210-0250	UNDERCUT EXCAVATION - PROJECT NO.: F01520.1 (PER SPECIFICATION 210.5C)	CY	750	\$18.00	\$13,500.00
080	310-1101	GRADED AGGREGATE BASE CRS, INCL MATL	TN	3,026		
085	318-3001	AGGREGATE SURFACE COURSE	TN	210		
090	402-1802	RECYCLED ASPH CONC PATCHING, INCL BITUM MATL & H LIME	TN	50		
095	402-4510	RECYCLED ASPH CONC 12.5 MM SUPERPAVE, TYPE II, GP 2 ONLY, INCL BITUM MATL & H LIME	TN	2,000		
100	402-3190	RECYCLED ASPH CONC 19 MM SUPERPAVE, GP 1 OR 2, INCL BITUM MATL & H LIME	TN	750		
105	402-3121	RECYCLED ASPH CONC 25 MM SUPERPAVE, GP 1 OR 2, INCL BITUM MATL & H LIME	TN	2,090		
110	413-0750	TACK COAT	GL	1,450		
115	432-0206	MILL ASPH CONC PVMT, 1 1/2 IN DEPTH	SY	21,140		
120	441-0016	DRIVEWAY CONCRETE, 6 IN TK	SY	46		
125	441-0104	CONC SIDEWALK, 4 IN TK	SY	2,579		
130	441-0108	CONC SIDEWALK, 8 IN TK	SY	324		
135	441-0754	CONCRETE MEDIAN, 7 1/2 IN	SY	90		
140	441-4020	CONC VALLEY GUTTER, 6 IN	SY	34		
145	441-6222	CONC CURB & GUTTER, 8 IN X 30 IN, TP 2	LF	3,235		

COMPANY NAME: \_\_\_\_\_  
Failure to return this page my result in rejection of bid.

<b>GWINNETT COUNTY, GEORGIA</b>	
PROJECT #:	F01520.1
PROJECT:	SR 20 / BUFORD DRIVE (FROM TECH CENTER PKWY TO I-85 SB EXIT RAMP TERMINAL) & SR 20 / BUFORD DRIVE (FROM ROCK SPRINGS ROAD TO BRAND SMART WAY)
BID NUMBER:	BL060-26

**ADDENDUM NO. 1**  
**(Revised Bid Schedule)**

**BID SCHEDULE**

Item #	GDOT #	Description	Units	Est. Bid Quantity	Unit Price Bid	Total Price Bid
150	446-1100	PVMT REINF FABRIC STRIPS, TP 2, 18 INCH WIDTH	LF	5,870		
155	456-2076	SINUSOIDAL SHOULDER RUMBLE STRIPS - GROUND-IN-PLACE SKIP, 16 IN (400MM)	GLM	2		
160	500-9999	CLASS B CONC, BASE OR PVMT WIDENING	CY	23		
165	621-6200**	CONCRETE SIDE BARRIER, TP 2-S	LF	661		
170	632-0003	CHANGEABLE MESSAGE SIGN, PORTABLE, TYPE 3	EA	4		
175	641-1200	GUARDRAIL, TP W	LF	1,065		
180	641-1100	GUARDRAIL, TP T	LF	116		
185	641-5001	GUARDRAIL ANCHORAGE, TP 1	EA	2		
190	641-5015	GUARDRAIL ANCHORAGE, TP 12A - 31 IN, TANGENT, ENERGY-ABSORBING	EA	5		
195	643-8200	BARRIER FENCE (ORANGE), 4 FT	LF	1,530		

**DRAINAGE ITEMS**

200	441-0204	PLAIN CONC DITCH PAVING, 4 IN	SY	324		
205	550-5180	STORM DRAIN PIPE, 18 IN, CLASS III	LF	1,348		
210	550-5240	STORM DRAIN PIPE, 24 IN, CLASS III	LF	1,056		
215	550-5300	STORM DRAIN PIPE, 30 IN, CLASS III	LF	20		
220	550-4218	FLARED END SECTION 18 IN, STORM DRAIN	EA	3		

COMPANY NAME: \_\_\_\_\_  
Failure to return this page my result in rejection of bid.

<b>GWINNETT COUNTY, GEORGIA</b>	
PROJECT #:	F01520.1
PROJECT:	SR 20 / BUFORD DRIVE (FROM TECH CENTER PKWY TO I-85 SB EXIT RAMP TERMINAL) & SR 20 / BUFORD DRIVE (FROM ROCK SPRINGS ROAD TO BRAND SMART WAY)
BID NUMBER:	BL060-26

**ADDENDUM NO. 1**  
**(Revised Bid Schedule)**

**BID SCHEDULE**

Item #	GDOT #	Description	Units	Est. Bid Quantity	Unit Price Bid	Total Price Bid
225	550-4224	FLARED END SECTION 24 IN, STORM DRAIN	EA	1		
230	550-4230	FLARED END SECTION 30 IN, STORM DRAIN	EA	1		
235	573-2006	UNDDR PIPE INCL DRAINAGE AGGR, 6 IN	LF	500		
240	603-2036	STN DUMPED RIP RAP, TP 1, 36 IN	SY	54		
245	603-2181	STN DUMPED RIP RAP, TP 3, 18 IN	SY	283		
250	603-7000	PLASTIC FILTER FABRIC	SY	337		
255	611-3000	RECONSTR CATCH BASIN, GROUP 1	EA	3		
260	611-3001	RECONSTR CATCH BASIN, GROUP 1, ADDL DEPTH	LF	2		
265	611-3030	RECONSTR STORM SEW MANHOLE, TYPE 1	EA	1		
270	611-3031	RECONSTR STORM SEW MANHOLE, TYPE 1, ADDL DEPTH CL 1	LF	2		
275	611-8040	ADJUST DROP INLET TO GRADE	EA	2		
280	668-1100	CATCH BASIN, GP 1	EA	23		
285	668-1110	CATCH BASIN, GP 1, ADDL DEPTH	LF	24		
290	668-2100	DROP INLET, GP 1	EA	11		
295	668-2110	DROP INLET, ADDL DEPTH	LF	2		

COMPANY NAME: \_\_\_\_\_  
Failure to return this page my result in rejection of bid.

<b>GWINNETT COUNTY, GEORGIA</b>	
PROJECT #:	F01520.1
PROJECT:	SR 20 / BUFORD DRIVE (FROM TECH CENTER PKWY TO I-85 SB EXIT RAMP TERMINAL) & SR 20 / BUFORD DRIVE (FROM ROCK SPRINGS ROAD TO BRAND SMART WAY)
BID NUMBER:	BL060-26

**ADDENDUM NO. 1**  
**(Revised Bid Schedule)**

**BID SCHEDULE**

Item #	GDOT #	Description	Units	Est. Bid Quantity	Unit Price Bid	Total Price Bid
300	668-4300	STORM SEWER MANHOLE, TP 1	EA	7		

305	668-4311	STORM SEWER MANHOLE, TP 1, ADDL DEPTH. CL 1	LF	7		
-----	----------	---	----	---	--	--

**PERMANENT EROSION CONTROL ITEMS**

310	700-2000A	GRASSING COMPLETE (SOD) - PROJECT NO.: F01520.1 SR 20 / BUFORD DR (FROM TECH CENTER PKWY TO I-85 SB EXIT RAMP TERMINAL)	LS	1		
-----	-----------	---	----	---	--	--

315	700-2000B	GRASSING COMPLETE (SOD) - PROJECT NO.: F01520.1 SR 20 / BUFORD DR (FROM ROCK SPRINGS ROAD TO BRAND SMART WAY)	LS	1		
-----	-----------	---	----	---	--	--

**SIGNING AND MARKING ITEMS**

320	636-1033	TP 1 MATL, REFL SHEETING TP 9	SF	153		
-----	----------	-------------------------------	----	-----	--	--

325	636-1036	TP 1 MATL, REFL SHEETING TP 11	SF	250		
-----	----------	--------------------------------	----	-----	--	--

330	636-2070	GALV STEEL POSTS, TYPE 7	LF	756		
-----	----------	--------------------------	----	-----	--	--

335	636-2090	GALV STEEL POSTS, TYPE 9	LF	74		
-----	----------	--------------------------	----	----	--	--

340	652-5701	THERMOPLASTIC SOLID TRAF STRIPE, 24 IN, WHITE	LF	2,310		
-----	----------	---	----	-------	--	--

345	652-5801	THERMOPLASTIC SOLID TRAF STRIPE, 8 IN, WHITE	LF	3,310		
-----	----------	--	----	-------	--	--

350	653-0110	THERMOPLASTIC PVMT MARKING, ARROW, TP 1	EA	1		
-----	----------	---	----	---	--	--

355	653-0120	THERMOPLASTIC PVMT MARKING, ARROW, TP 2	EA	12		
-----	----------	---	----	----	--	--

360	653-0210	THERMOPLASTIC PVMT MARKING, WORD, TP 1	EA	3		
-----	----------	--	----	---	--	--

365	653-0296	THERMOPLASTIC PVMT MARKING, WORD, TP 15	EA	1		
-----	----------	---	----	---	--	--

370	653-1906	THERMOPLASTIC SOLID TRAF STRIPE, 6 IN, WHITE	LF	6,657		
-----	----------	--	----	-------	--	--

COMPANY NAME: \_\_\_\_\_  
Failure to return this page my result in rejection of bid.

<b>GWINNETT COUNTY, GEORGIA</b>	
PROJECT #:	F01520.1
PROJECT:	SR 20 / BUFORD DRIVE (FROM TECH CENTER PKWY TO I-85 SB EXIT RAMP TERMINAL) & SR 20 / BUFORD DRIVE (FROM ROCK SPRINGS ROAD TO BRAND SMART WAY)
BID NUMBER:	BL060-26

**ADDENDUM NO. 1**  
**(Revised Bid Schedule)**

**BID SCHEDULE**

Item #	GDOT #	Description	Units	Est. Bid Quantity	Unit Price Bid	Total Price Bid
375	653-2602	THERMOPLASTIC SOLID TRAF STRIPE, 6 IN, YELLOW	LF	3,820		
380	653-2611	THERMOPLASTIC SKIP TRAF STRIPE, 6 IN, WHITE	GLF	13,050		
385	653-3810	THERMOPLASTIC SKIP TRAF STRIPE, 10 IN, WHITE	GLF	550		
390	653-4830	THERMOPLASTIC SKIP TRAF STRIPE, 18 IN, WHITE	GLF	260		
395	653-6004	THERMOPLASTIC TRAFFIC STRIPING, WHITE	SY	1,242		
400	654-1003	RAISED PAVEMENT MARKERS, TYPE 3	EA	470		
405	657-1085	PREFORMED PLASTIC SOLID PVMT MKG, 8 IN, CONTRAST (BLACK-WHITE), TP PB	LF	620		
410	657-3085	PREFORMED PLASTIC SKIP PVMT MKG, 8 IN, CONTRAST (BLACK-WHITE), TP PB	GLF	840		
415	657-5003	PREFORMED PLASTIC PAVEMENT MARKING, WORD TP 1, TP PB	EA	2		
420	657-5017	PREFORMED PLASTIC PVMT MKG WORDS AND/OR SYM, ARROW TP 2, WHITE TP PB	EA	3		
425	657-6085	PERFORMED PLASTIC SOLID PVMT MKG, 8 IN, CONTRAST (BLACK-YELLOW), TP PB	LF	420		
<b>SIGNAL ITEMS</b>						
430	636-1041**	HIGHWAY SIGNS , TP 2 MATL, REFL SHEETING, TP 9	SF	249		
435	639-4004	CONCRETE STRAIN POLE, TP IV, W/ LUMINAIRE, WITH 10 FT ADDITIONAL HEIGHT	EA	1		
440	639-4004	CONCRETE STRAIN POLE, TP IV, W/ LUMINAIRE	EA	7		
445	639-4004	CONCRETE STRAIN POLE, TP IV	EA	7		

COMPANY NAME: \_\_\_\_\_  
Failure to return this page my result in rejection of bid.

<b>GWINNETT COUNTY, GEORGIA</b>	
PROJECT #:	F01520.1
PROJECT:	SR 20 / BUFORD DRIVE (FROM TECH CENTER PKWY TO I-85 SB EXIT RAMP TERMINAL) & SR 20 / BUFORD DRIVE (FROM ROCK SPRINGS ROAD TO BRAND SMART WAY)
BID NUMBER:	BL060-26

**ADDENDUM NO. 1**  
**(Revised Bid Schedule)**

**BID SCHEDULE**

Item #	GDOT #	Description	Units	Est. Bid Quantity	Unit Price Bid	Total Price Bid
450	639-4004	CONCRETE STRAIN POLE, TP IV WITH 10 FT ADDITIONAL HEIGHT	EA	1		
455	647-1000	TRAFFIC SIGNAL INSTALLATION #1	LS	1		
460	647-1000	TRAFFIC SIGNAL INSTALLATION #2	LS	1		
465	647-1000	TRAFFIC SIGNAL INSTALLATION #3	LS	1		
470	647-1000	TRAFFIC SIGNAL INSTALLATION #4	LS	1		
475	682-2145	PULL BOX, TYPE 4S	EA	14		
480	682-2150	PULL BOX, TYPE 5	EA	4		
485	682-6233*	CONDUIT, NON-METAL, TP 3, 2 IN	LF	8,925		
490	682-9950	DIRECTIONAL BORE, 5 IN	LF	565		
495	937-6000	MICROWAVE RADAR DETECTION ASSEMBLY	EA	23		
<b>ITS</b>						
500	639-2001	STEEL WIRE STRAND CABLE, 1/4 IN	LF	150		
505	682-2175	PULL BOX, TYPE 7 (SPLIT LID)	EA	9		
510	682-6120	CONDUIT, RIGID, 2 IN	LF	60		
515	682-6222	CONDUIT, NON-METAL, TYPE 2, 2 IN	LF	65		
520	682-9950	DIRECTIONAL BORE - 7 IN	LF	410		

COMPANY NAME: \_\_\_\_\_  
Failure to return this page my result in rejection of bid.

<b>GWINNETT COUNTY, GEORGIA</b>	
PROJECT #:	F01520.1
PROJECT:	SR 20 / BUFORD DRIVE (FROM TECH CENTER PKWY TO I-85 SB EXIT RAMP TERMINAL) & SR 20 / BUFORD DRIVE (FROM ROCK SPRINGS ROAD TO BRAND SMART WAY)
BID NUMBER:	BL060-26

**ADDENDUM NO. 1**  
**(Revised Bid Schedule)**

**BID SCHEDULE**

Item #	GDOT #	Description	Units	Est. Bid Quantity	Unit Price Bid	Total Price Bid
525	926-5000	CONNECTED VEHICLE ROADSIDE UNIT	EA	4		
530	935-1117	OSP FIBER OPTIC CABLE, LOOSE TUBE, SM,96 FIBER	LF	3,635		
535	935-1512	OSP FIBER OPTIC CABLE, DROP, SINGLE MODE, 12 FIBER	LF	770		
540	935-4102	FIBER OPTIC CLOSURE, UNDERGROUND, 12 SPLICE	EA	3		
545	935-4107	FIBER OPTIC CLOSURE, UNDERGROUND, 96 SPLICE	EA	2		
550	935-4502	FIBER PATCH PANEL, WALL MOUNT, 12 PORT	EA	4		
555	936-4000	CCTV CAMERA SYSTEM, TYPE 1	EA	2		
560	936-4902	CCTV MOUNTING ARM, TYPE 2	EA	2		
565	939-2325	FIELD SWITCH, TYPE E-CB	EA	4		
570	939-2396	SFP FIBER MODULE, TYPE 1-CC	EA	8		

**UTILITY ITEMS**

575	331219.81-AVB	ADJUST VALVE BOX	EA	1		
580	331219.81-RFH	RELOCATE EXISTING FIRE HYDRANT	EA	1		
585	331216-12GV	GATE VALVE - 12 IN DIAMETER	EA	1		
590	331213-1LS	WATER SERVICE CONNECTIONS - 3/4 IN - 1 IN LONG SIDE SERVICE CONNECTIONS	EA	1		

(\* ) Item contains signal & ITS quantity

(\*\* ) Item included in Addendum No. 1

**TOTAL**

COMPANY NAME: \_\_\_\_\_  
Failure to return this page my result in rejection of bid.

<b>GWINNETT COUNTY, GEORGIA</b>	
PROJECT #:	F01520.1
PROJECT:	SR 20 / BUFORD DRIVE (FROM TECH CENTER PKWY TO I-85 SB EXIT RAMP TERMINAL) & SR 20 / BUFORD DRIVE (FROM ROCK SPRINGS ROAD TO BRAND SMART WAY)
BID NUMBER:	BL060-26

**ADDENDUM NO. 1**  
**(Revised Bid Schedule)**

**BID SCHEDULE**

Item #	GDOT #	Description	Units	Est. Bid Quantity	Unit Price Bid	Total Price Bid
--------	--------	-------------	-------	-------------------	----------------	-----------------

CERTIFICATION OF NONCOLLUSION IN BID PREPARATION \_\_\_\_\_  
(Signature) (Date)

The County requires that all who enter into a contract for the physical performance of services with the County must satisfy O.C.G.A. § 13-10-91 and Rule 300-10-1-.02, in a manner, and such are conditions of the contract.

In compliance with the attached specifications, the undersigned offers and agrees, if this bid is accepted by the Board of Commissioners within ninety (90) days of the date of bid opening, to furnish any or all of the items upon which prices are quoted within the time specified in the bid schedule. By submission of this bid, I understand that Gwinnett County uses Electronic Payments for remittance of goods and services. Vendors should select their preferred method of electronic payment upon notice of award. For more information on electronic payments, please refer to the Electronic Payment information in the Instructions to Bidders.

LEGAL BUSINESS NAME: \_\_\_\_\_  
*If your company is an LLC, you must identify all principals to include address and phone numbers in your submittal*

ADDRESS: \_\_\_\_\_

DOES YOUR COMPANY CURRENTLY HAVE A LOCATION WITHIN GWINNETT COUNTY?      YES          NO   

REPRESENTATIVE SIGNATURE: \_\_\_\_\_

PRINT AUTHORIZED REPRESENTATIVE'S NAME: \_\_\_\_\_

TELEPHONE NUMBER: \_\_\_\_\_ FAX: \_\_\_\_\_

E-MAIL ADDRESS \_\_\_\_\_

### SIGNAL LEGEND

#### EXISTING

- CONTROLLER CABINET
- STRAIN POLE
- TIMBER POLE
- DOWN GUY
- MAST ARM
- STREET LIGHT
- 3 SECTION FACE
- 3 SECTION FACE W/BACKPLATE
- 4 SECTION FACE
- 4/5 SECTION HEAD (CLUSTER/T-SHAPE) FACE
- 4/5 SECTION HEAD (CLUSTER/T-SHAPE) FACE / W BACKPLATE
- OVERHEAD SIGN
- PEDESTAL POLE
- PED SIGNAL HEAD
- CURB CUT RAMP
- PULLBOX, (TYPE TO BE CALLED OUT)
- 6x6 PULSE LOOP
- 6x18 CALL LOOP
- 6x40 PRESENCE LOOP (DIPOLE)
- 6x40 PRESENCE LOOP (QUADRUPOLE)
- CONDUIT
- RAILROAD CONTROLLER
- SIGN POST
- RADAR DETECTION DEVICE
- MAGNETOMETER DETECTION DEVICE
- VIDEO DETECTION DEVICE

#### PROPOSED

- CONTROLLER CABINET
- STRAIN POLE
- TIMBER POLE
- DOWN GUY
- MAST ARM
- STREET LIGHT
- 3 SECTION FACE W/ RETROREFLECTIVE BACKPLATE
- 4 SECTION FACE W/ RETROREFLECTIVE BACKPLATE
- 4/5 SECTION (CLUSTER/T-SHAPE) FACE W/ RETROREFLECTIVE BACKPLATE
- OVERHEAD SIGN
- PEDESTAL POLE
- PED SIGNAL FACE
- PULLBOX, TP 2
- PULLBOX, TP 3
- PULLBOX, TP 4
- PULLBOX, TP 5
- CONDUIT
- CONDUIT, DIRECTIONAL BORE
- SIGN POST
- DIPOLE INDUCTANCE LOOP (SIZE TO BE CALLED OUT)
- QUADRUPOLE INDUCTANCE LOOP (SIZE TO BE CALLED OUT)
- VIRTUAL DETECTION ZONE (RADAR, VIDO, ETC.)
- RAILROAD CONTROLLER CABINET
- RADAR DETECTION DEVICE
- MAGNETOMETER DETECTION DEVICE
- VIDEO DETECTION DEVICE

#### RELOCATED

- 3 SECTION FACE W/RETROREFLECTIVE BACKPLATE
- 4/5 SECTION HEAD (CLUSTER/T-SHAPE) FACE / W/RETROREFLECTIVE BACKPLATE
- 4/5 SECTION HEAD (CLUSTER/T-SHAPE) FACE / W/RETROREFLECTIVE BACKPLATE
- PEDESTAL POLE
- PED SIGNAL HEAD

**Michael Baker**

**INTERNATIONAL**

3930 East Jones Bridge Road, Suite 220  
Peachtree Corners, GA 30092  
Phone: (770) 263-9118

REVISION DATES


ADDENDUM #1		

GWINNETT COUNTY  
DEPARTMENT OF TRANSPORTATION  
OFFICE: PROGRAM DELIVERY  
**SIGNAL PLANS**

SR 20 SIGNAL LEGEND



DRAWING No.  
**27-0001**

### PHASING DIAGRAM

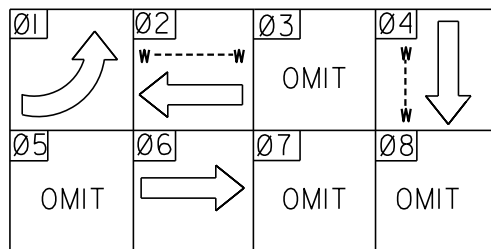


### PROPOSED LED SIGNAL HEADS W/ RETROREFLECTIVE BACKPLATES


### PROPOSED LED PEDESTRIAN SIGNAL HEADS

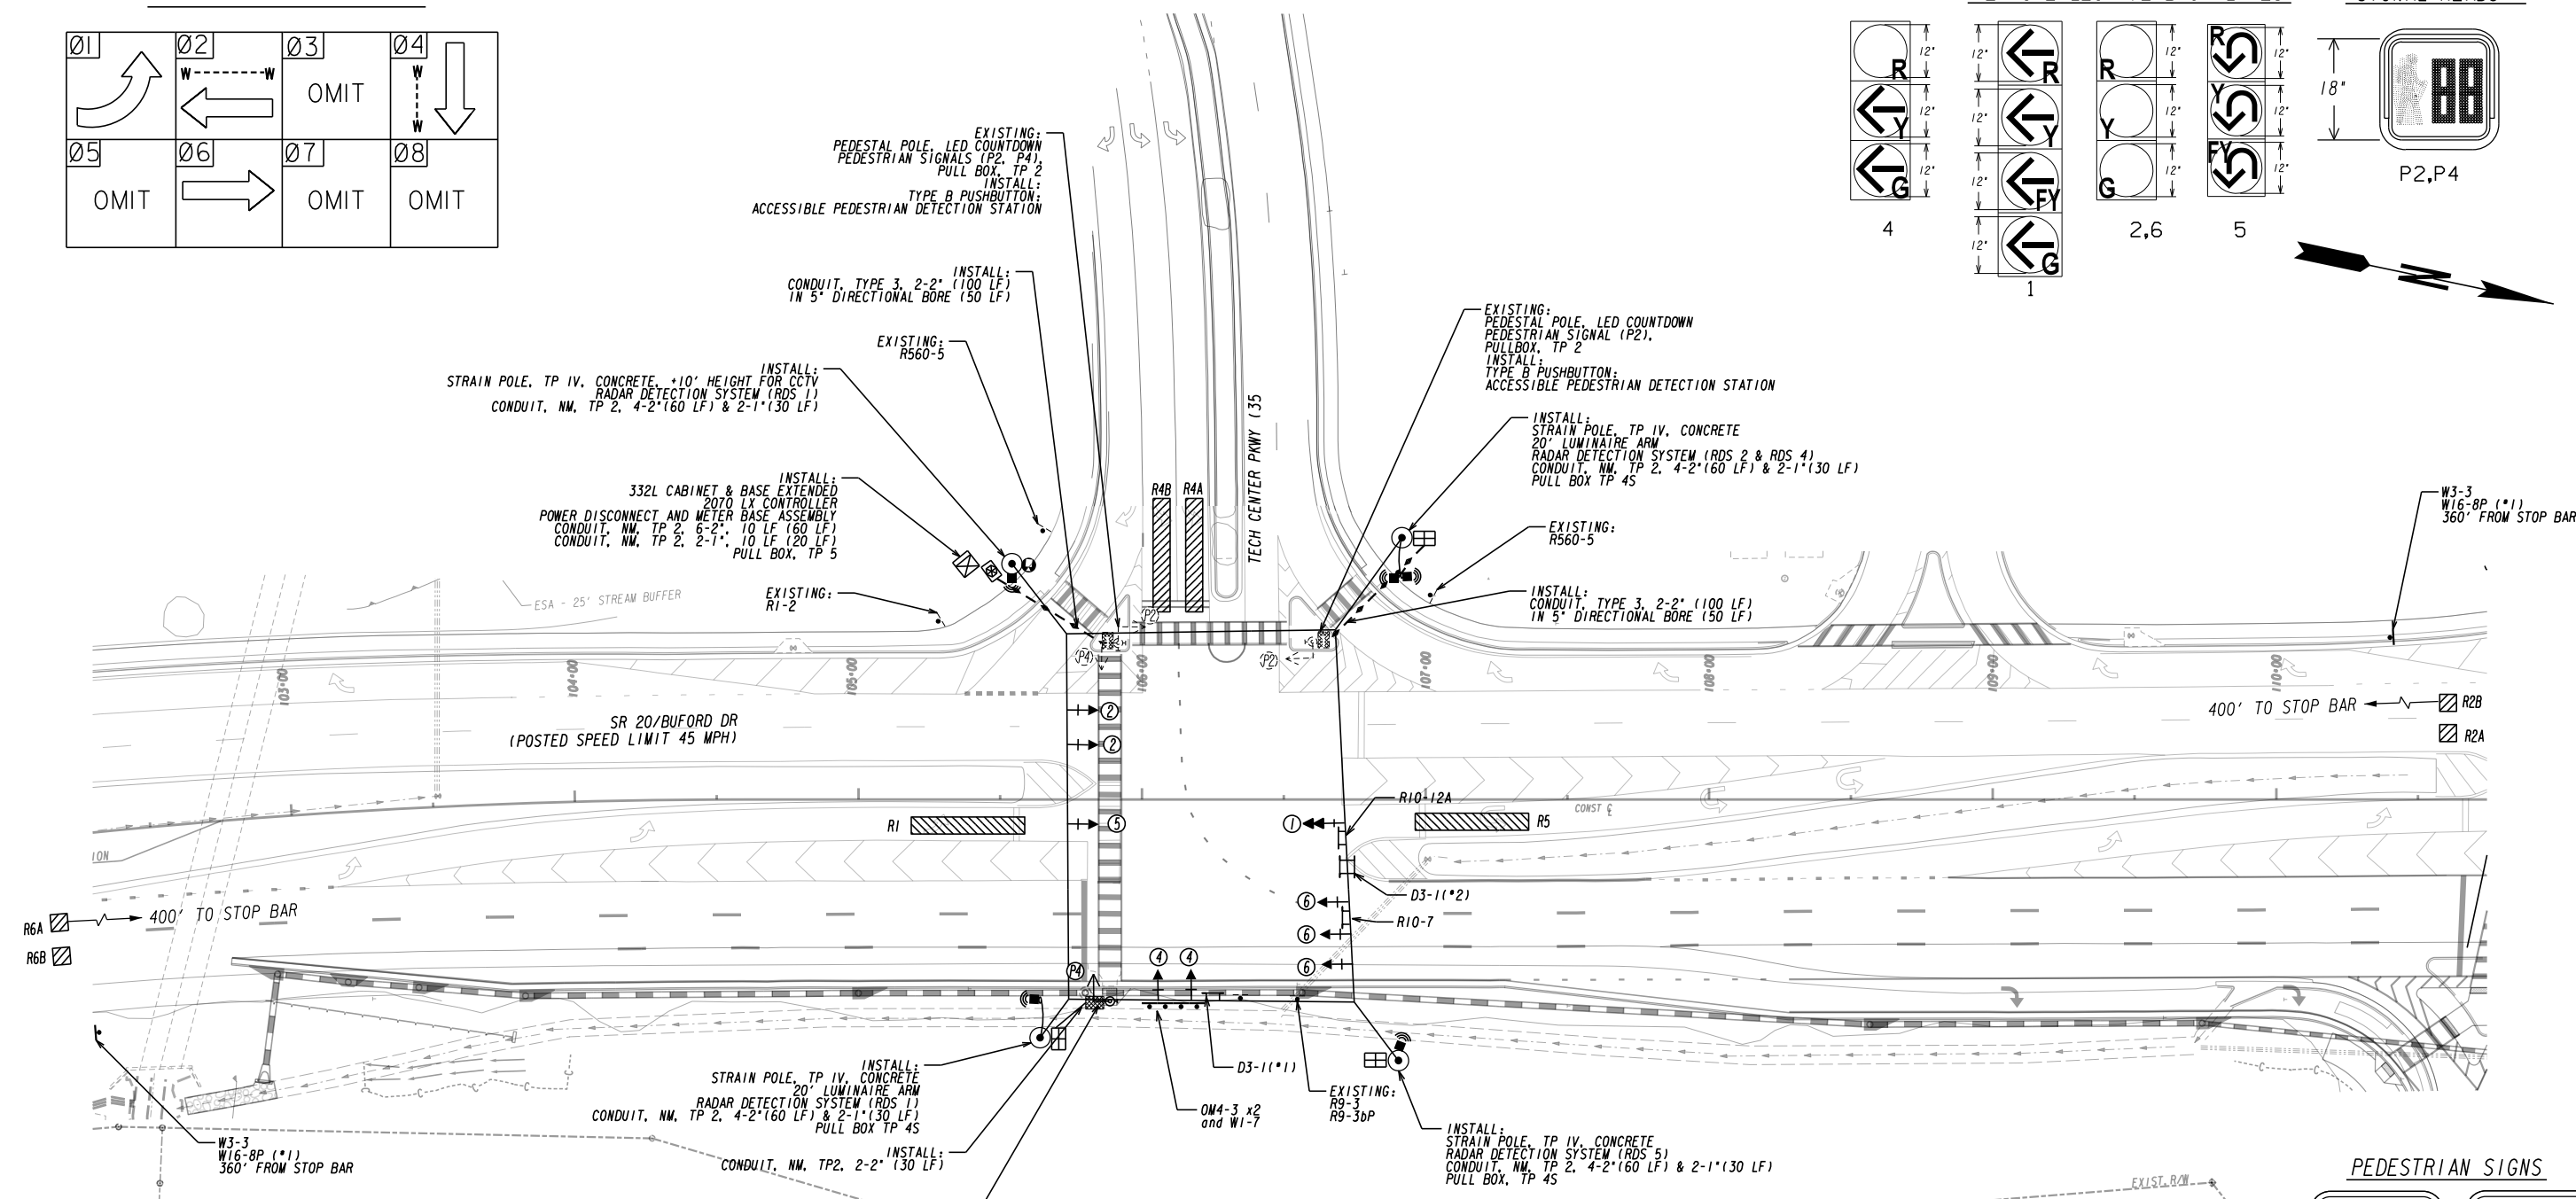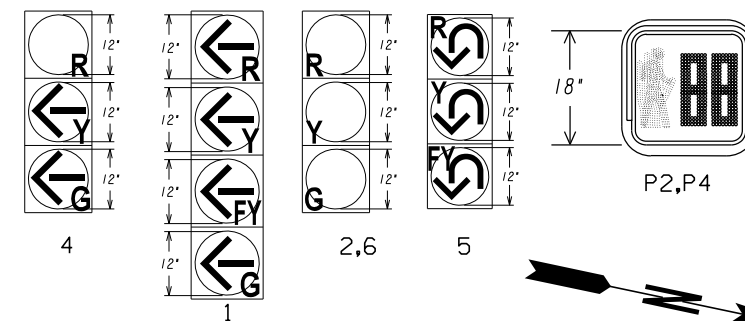


### OVERHEAD STREET NAME SIGNS




### WARNING SIGNS (SEE 26 SERIES)

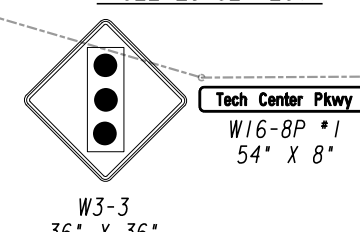

### REGULATORY SIGNS

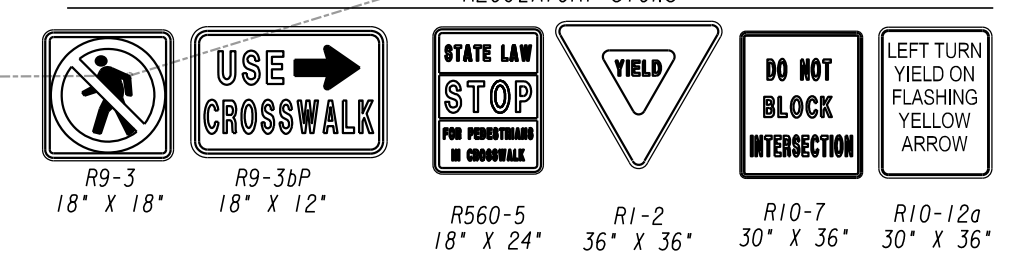


### PEDESTRIAN SIGNS

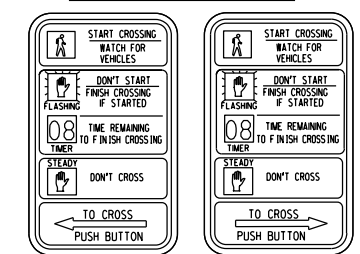


NOTE: CONTRACTOR SHALL VERIFY RADAR PLACEMENT WITH MANUFACTURER


### SIGNAL LEGEND

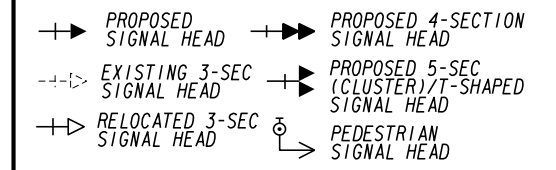

### DETECTION LEGEND

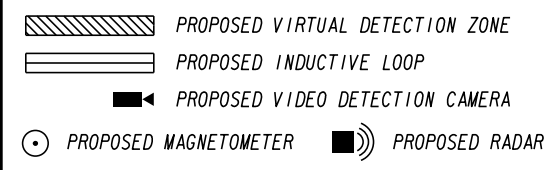

**Michael Baker INTERNATIONAL**  
3930 East Jones Bridge Road, Suite 220  
Peachtree Corners, GA 30092  
Phone: (770) 263-9118



APPROVED  
2026.03.23  
09:32:33-04'00'  
TMC  
Georgia D.O.T.

GWINNETT COUNTY  
DEPARTMENT OF TRANSPORTATION  
OFFICE: PROGRAM DELIVERY  
**TRAFFIC SIGNAL INSTALLATION #1**  
GCDOT \*568  
SR 20 @ TECH CENTER PKWY  
DRAWING No. 27-0002

LIST OF MATERIALS (FOR INFORMATION ONLY - CONTRACTOR REQUIRED TO VERIFY)	UNIT	QUANTITY
CONTROLLER CABINET ASSEMBLIES		
B. CONTROLLER UNIT, MODEL 2070LX	EA	1
D. CABINET ASSEMBLY, MODEL 332L	EA	1
F. SWITCH PACK (Load Switch)	EA	7
G. DC ISOLATOR	EA	1
L. 2018 SIGNAL MONITOR, KCLIP W/EXTENDED FEATURES	EA	1
M. AUXILLARY OUTPUT FILE	EA	1
332L PREFABRICATED CONTROLLER CABINET W/ EXTENDED BASE	EA	1
PED LEAD-IN WIRE (SHIELDED, TWISTED/1000 FT); 3 PAIR, 18 AWG	REEL	1
SIGNAL CABLE (14 AWG); 7 CONDUCTOR, PER 1000 FT.	REEL	2
3-SECTION, 12" SIGNAL HEAD LED - , BLACK HOUSING w/ BLACK FRONT, PLASTIC, INCANDESCENT LOOK, CLEAR LENSES	EA	8
4-SECTION, 12" SIGNAL HEAD LED - , BLACK HOUSING w/ BLACK FRONT, PLASTIC, INCANDESCENT LOOK	EA	1
1-SECTION, 16" x 18" LED COUNTDOWN PEDESTRIAN SIGNAL HEAD, FULL HAND/MAN OVERLAP, BLACK <i>9" HIGH, Numbers &amp; 12" Symbols</i>	EA	1
PEDESTRIAN PUSHBUTTON STATION ADAPTERS (ONLY) <i>9" x 15", Single Push Button Station Adapter for 4" Dia Pedestrian Pole, Adjustable</i>	EA	1
ACCESSIBLE PEDESTRIAN PUSHBUTTONS STATIONS (TYPE B), w/BUTTONS and SIGNS, BLACK: <i>9" x 15", R10-3e, (L)eft or (R)ight, Countdown</i>	EA	3
BACK PLATE FOR ONE-WAY, 3-SECTION, 12" SIGNAL HEAD, ABS PLASTIC, BLACK w/ RETROREFLECTIVE STRIP	EA	8
BACK PLATE FOR ONE-WAY, 4-SECTION, 12" SIGNAL HEAD, ABS PLASTIC, BLACK w/ RETROREFLECTIVE STRIP	EA	1
HARDWARE FOR SPANWIRE MOUNTING (3 or 4 Section Signals)	EA	9
HARDWARE FOR SIDE-OF-POLE MOUNTING, ONE-WAY BRACKET ASSEMBLY; CONCRETE, TIMBER, STEEL POLE, CLAM SHELL	EA	1
10' PEDESTAL POLE & SQUARE BASE	EA	1
PULL BOX, PB-2	EA	1
CONDUIT, 1"	LF	150
CONDUIT, 2"	LF	320
R10-12A, LEFT TURN YIELD ON FLASHING YELLOW SIGN	EA	1
R10-7, DO NOT BLOCK INTERSECTION SIGN	EA	1
MISCELLANEOUS MATERIALS NEEDED TO COMPLETE INSTALLATION	LUMP	LUMP

PAY ITEMS (FOR INFORMATION ONLY - CONTRACTOR REQUIRED TO VERIFY)	UNIT	QUANTITY
682-9950 DIRECTIONAL BORE, 5"	LF	100
636-1041 HIGHWAY SIGNS , TP 2 MATL, REFL SHEETING, TP 9	SF	53
647-2140 PULL BOX, PB-4S	EA	3
647-2150 PULL BOX, PB-5	EA	1
647-2150 CONCRETE STRAIN POLE, TP IV	EA	1
639-4004 CONCRETE STRAIN POLE, TP IV, W/LUMINAIRE	EA	2
639-4004 CONCRETE STRAIN POLE, TP IV, WITH 10' ADDITIONAL HEIGHT	EA	1
937-6000 MICROWAVE RADAR DETECTION ASSEMBLY	EA	5
647-1000 TRAFFIC SIGNAL INSTALLATION #1	LS	1
682-6233 CONDUIT, NONMETAL, TP 3, 2 IN	LF	200

**Michael Baker**

**INTERNATIONAL**

3930 East Jones Bridge Road, Suite 220  
Peachtree Corners, GA 30092  
Phone: (770) 263-9118

REVISION DATES

ADDENDUM #1		

GWINNETT COUNTY  
DEPARTMENT OF TRANSPORTATION  
OFFICE: PROGRAM DELIVERY


**TRAFFIC SIGNAL INSTALLATION #1**

GCDOT \*568


SR 20 @ TECH CENTER PKWY

DRAWING No.  
**27-0003**



### PHASING DIAGRAM

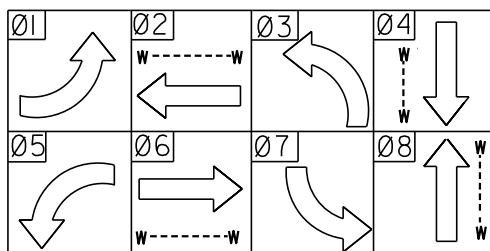

### PROPOSED LED SIGNAL HEADS W/ RETROREFLECTIVE BACKPLATES

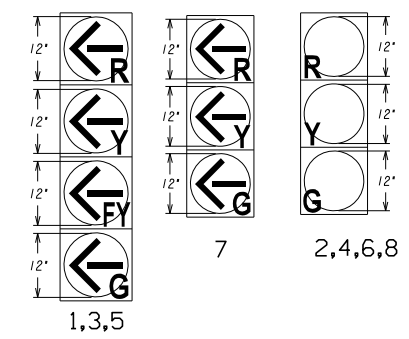

### PROPOSED LED PEDESTRIAN SIGNAL HEADS

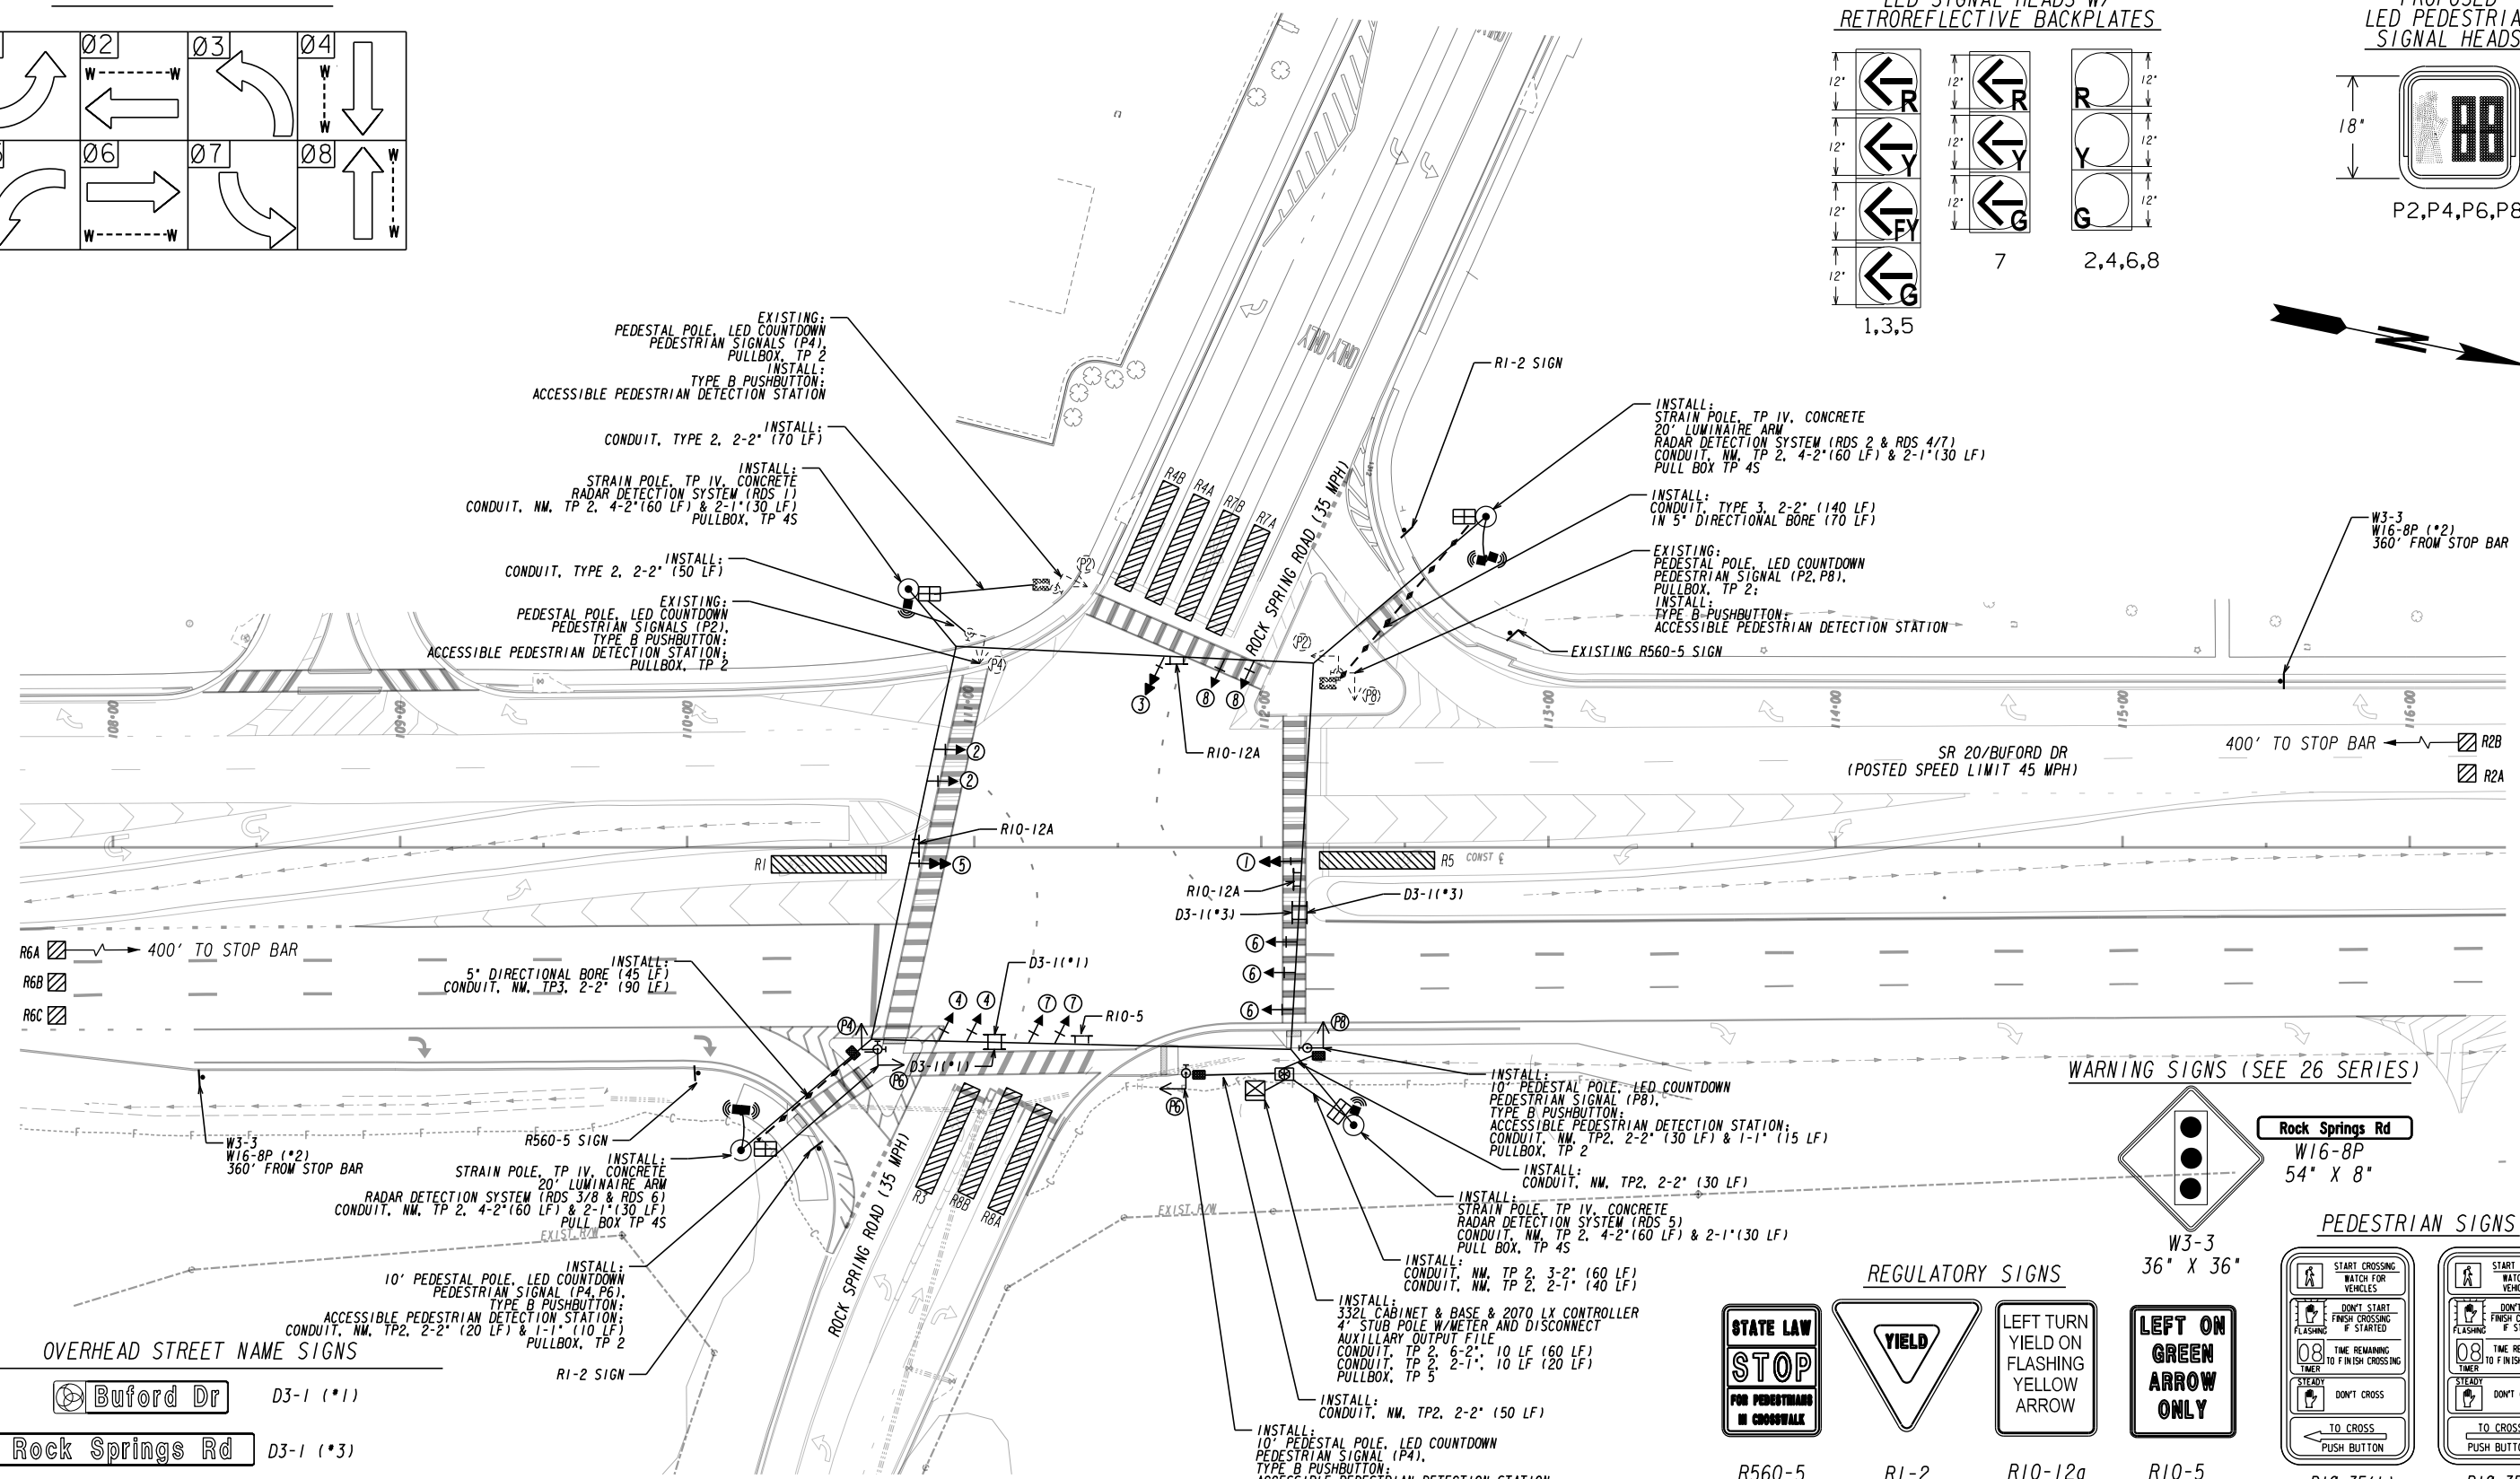


NOTE: CONTRACTOR SHALL VERIFY RADAR PLACEMENT WITH MANUFACTURER

SIGNAL LEGEND	
	PROPOSED SIGNAL HEAD
	PROPOSED 4-SECTION SIGNAL HEAD
	EXISTING 3-SEC SIGNAL HEAD
	PROPOSED 5-SEC (CLUSTER)/T-SHAPED SIGNAL HEAD
	RELOCATED 3-SEC SIGNAL HEAD
	PEDESTRIAN SIGNAL HEAD

DETECTION LEGEND	
	PROPOSED VIRTUAL DETECTION ZONE
	PROPOSED INDUCTIVE LOOP
	PROPOSED VIDEO DETECTION CAMERA
	PROPOSED MAGNETOMETER
	PROPOSED RADAR

## Michael Baker INTERNATIONAL

3930 East Jones Bridge Road, Suite 220  
 Peachtree Corners, GA 30092  
 Phone: (770) 263-9118



APPROVED

2026.03.23  
09:38:53-04'00'

TMC  
Georgia D.O.T.

GWINNETT COUNTY  
DEPARTMENT OF TRANSPORTATION

OFFICE: PROGRAM DELIVERY

**TRAFFIC SIGNAL INSTALLATION #2**

GCDOT #335

SR 20 @ ROCK SPRINGS RD

DRAWING No. 27-0004

LIST OF MATERIALS (FOR INFORMATION ONLY - CONTRACTOR REQUIRED TO VERIFY)	UNIT	QUANTITY
CONTROLLER CABINET ASSEMBLIES		
B. CONTROLLER UNIT, MODEL 2070LX	EA	1
D. CABINET ASSEMBLY, MODEL 332L	EA	1
F. SWITCH PACK (Load Switch)	EA	12
G. DC ISOLATOR	EA	1
K. 2018 SIGNAL MONITOR, KCLIP W/EXTENDED FEATURES	EA	1
M. AUXILLARY OUTPUT FILE	EA	1
332L PREFABRICATED CONTROLLER CABINET W/ EXTENDED BASE	EA	1
PED LEAD-IN WIRE (SHIELDED, TWSTED/1000 FT); 3 PAIR, 18 AWG	REEL	1
SIGNAL CABLE (14 AWG); 7 CONDUCTOR, PER 1000 FT.	REEL	2
3-SECTION, 12" SIGNAL HEAD LED - BLACK HOUSING w/ BLACK FRONT, PLASTIC, INCANDESCENT LOOK, CLEAR LENSES	EA	11
4-SECTION, 12" SIGNAL HEAD LED - BLACK HOUSING w/ BLACK FRONT, PLASTIC, INCANDESCENT LOOK, CLEAR LENSES	EA	3
1-SECTION, 16" x 18" LED COUNTDOWN PEDESTRIAN SIGNAL HEAD, FULL HAND/MAN OVERLAP, BLACK		
9" HIGH, Numbers & 12" Symbols	EA	8
PEDESTRIAN PUSHBUTTON STATION ADAPTERS (ONLY)		
9" x 15", Single Push Button Station Adapter for 4" Dia Pedestrian Pole, Adjustable	EA	1
9" x 15", Double Push Button Station Adapter for 4" Dia Pedestrian Pole, Adjustable	EA	1
ACCESSIBLE PEDESTRIAN PUSHBUTTONS STATIONS (TYPE B), w/BUTTONS and SIGNS, BLACK:		
9" x 15", R10-3e, (L)eft or (R)ight, Countdown	EA	8
BACK PLATE FOR ONE-WAY, 3-SECTION, 12" SIGNAL HEAD, ABS PLASTIC, BLACK w/ RETROREFLECTIVE STRIP	EA	11
BACK PLATE FOR ONE-WAY, 4-SECTION, 12" SIGNAL HEAD, ABS PLASTIC, BLACK w/ RETROREFLECTIVE STRIP	EA	3
HARDWARE FOR SPANWIRE MOUNTING (3 or 4 Section Signals)	EA	14
HARDWARE FOR SIDE-OF-POLE MOUNTING, ONE-WAY BRACKET ASSEMBLY; CONCRETE, TIMBER, STEEL POLE, CLAM SHELL	EA	4
10' PEDESTAL POLE & SQUARE BASE	EA	3
PULL BOX, PB-2	EA	3
CONDUIT, 1"	LF	220
CONDUIT, 2"	LF	640
R10-5 LEFT ON GREEN ARROW ONLY	EA	1
R10-12A, LEFT TURN YIELD ON FLASHING YELLOW SIGN	EA	3
MISCELLANEOUS MATERIALS NEEDED TO COMPLETE INSTALLATION	LUMP	LUMP

PAY ITEMS (FOR INFORMATION ONLY - CONTRACTOR REQUIRED TO VERIFY)	UNIT	QUANTITY
682-9950 DIRECTIONAL BORE, 5"	LF	115
636-1041 HIGHWAY SIGNS, TP 2 MATL, REFL SHEETING, TP 9	SF	64
647-2140 PULL BOX, PB-4S	EA	4
647-2150 PULL BOX, PB-5	EA	1
639-4004 CONCRETE STRAIN POLE, TP IV	EA	2
639-4004 CONCRETE STRAIN POLE, TP IV, W/ LUMINAIRE	EA	2
937-6000 MICROWAVE RADAR DETECTION ASSEMBLY	EA	6
647-1000 TRAFFIC SIGNAL INSTALLATION #2	LS	1
682-6233 CONDUIT, NONMETAL, TP 3, 2 IN	LF	230

**Michael Baker**

**INTERNATIONAL**

3930 East Jones Bridge Road, Suite 220  
Peachtree Corners, GA 30092  
Phone: (770) 263-9118

REVISION DATES

ADDENDUM #1		

GWINNETT COUNTY  
DEPARTMENT OF TRANSPORTATION  
OFFICE: PROGRAM DELIVERY


**TRAFFIC SIGNAL INSTALLATION #2**

GCDOT \*335



SR 20 @ ROCK SPRINGS RD

DRAWING No.  
**27-0005**



### PHASING DIAGRAM

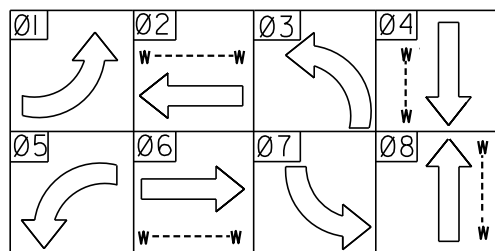


### PROPOSED LED SIGNAL HEADS W/ RETROREFLECTIVE BACKPLATES



### PROPOSED LED PEDESTRIAN SIGNAL HEADS

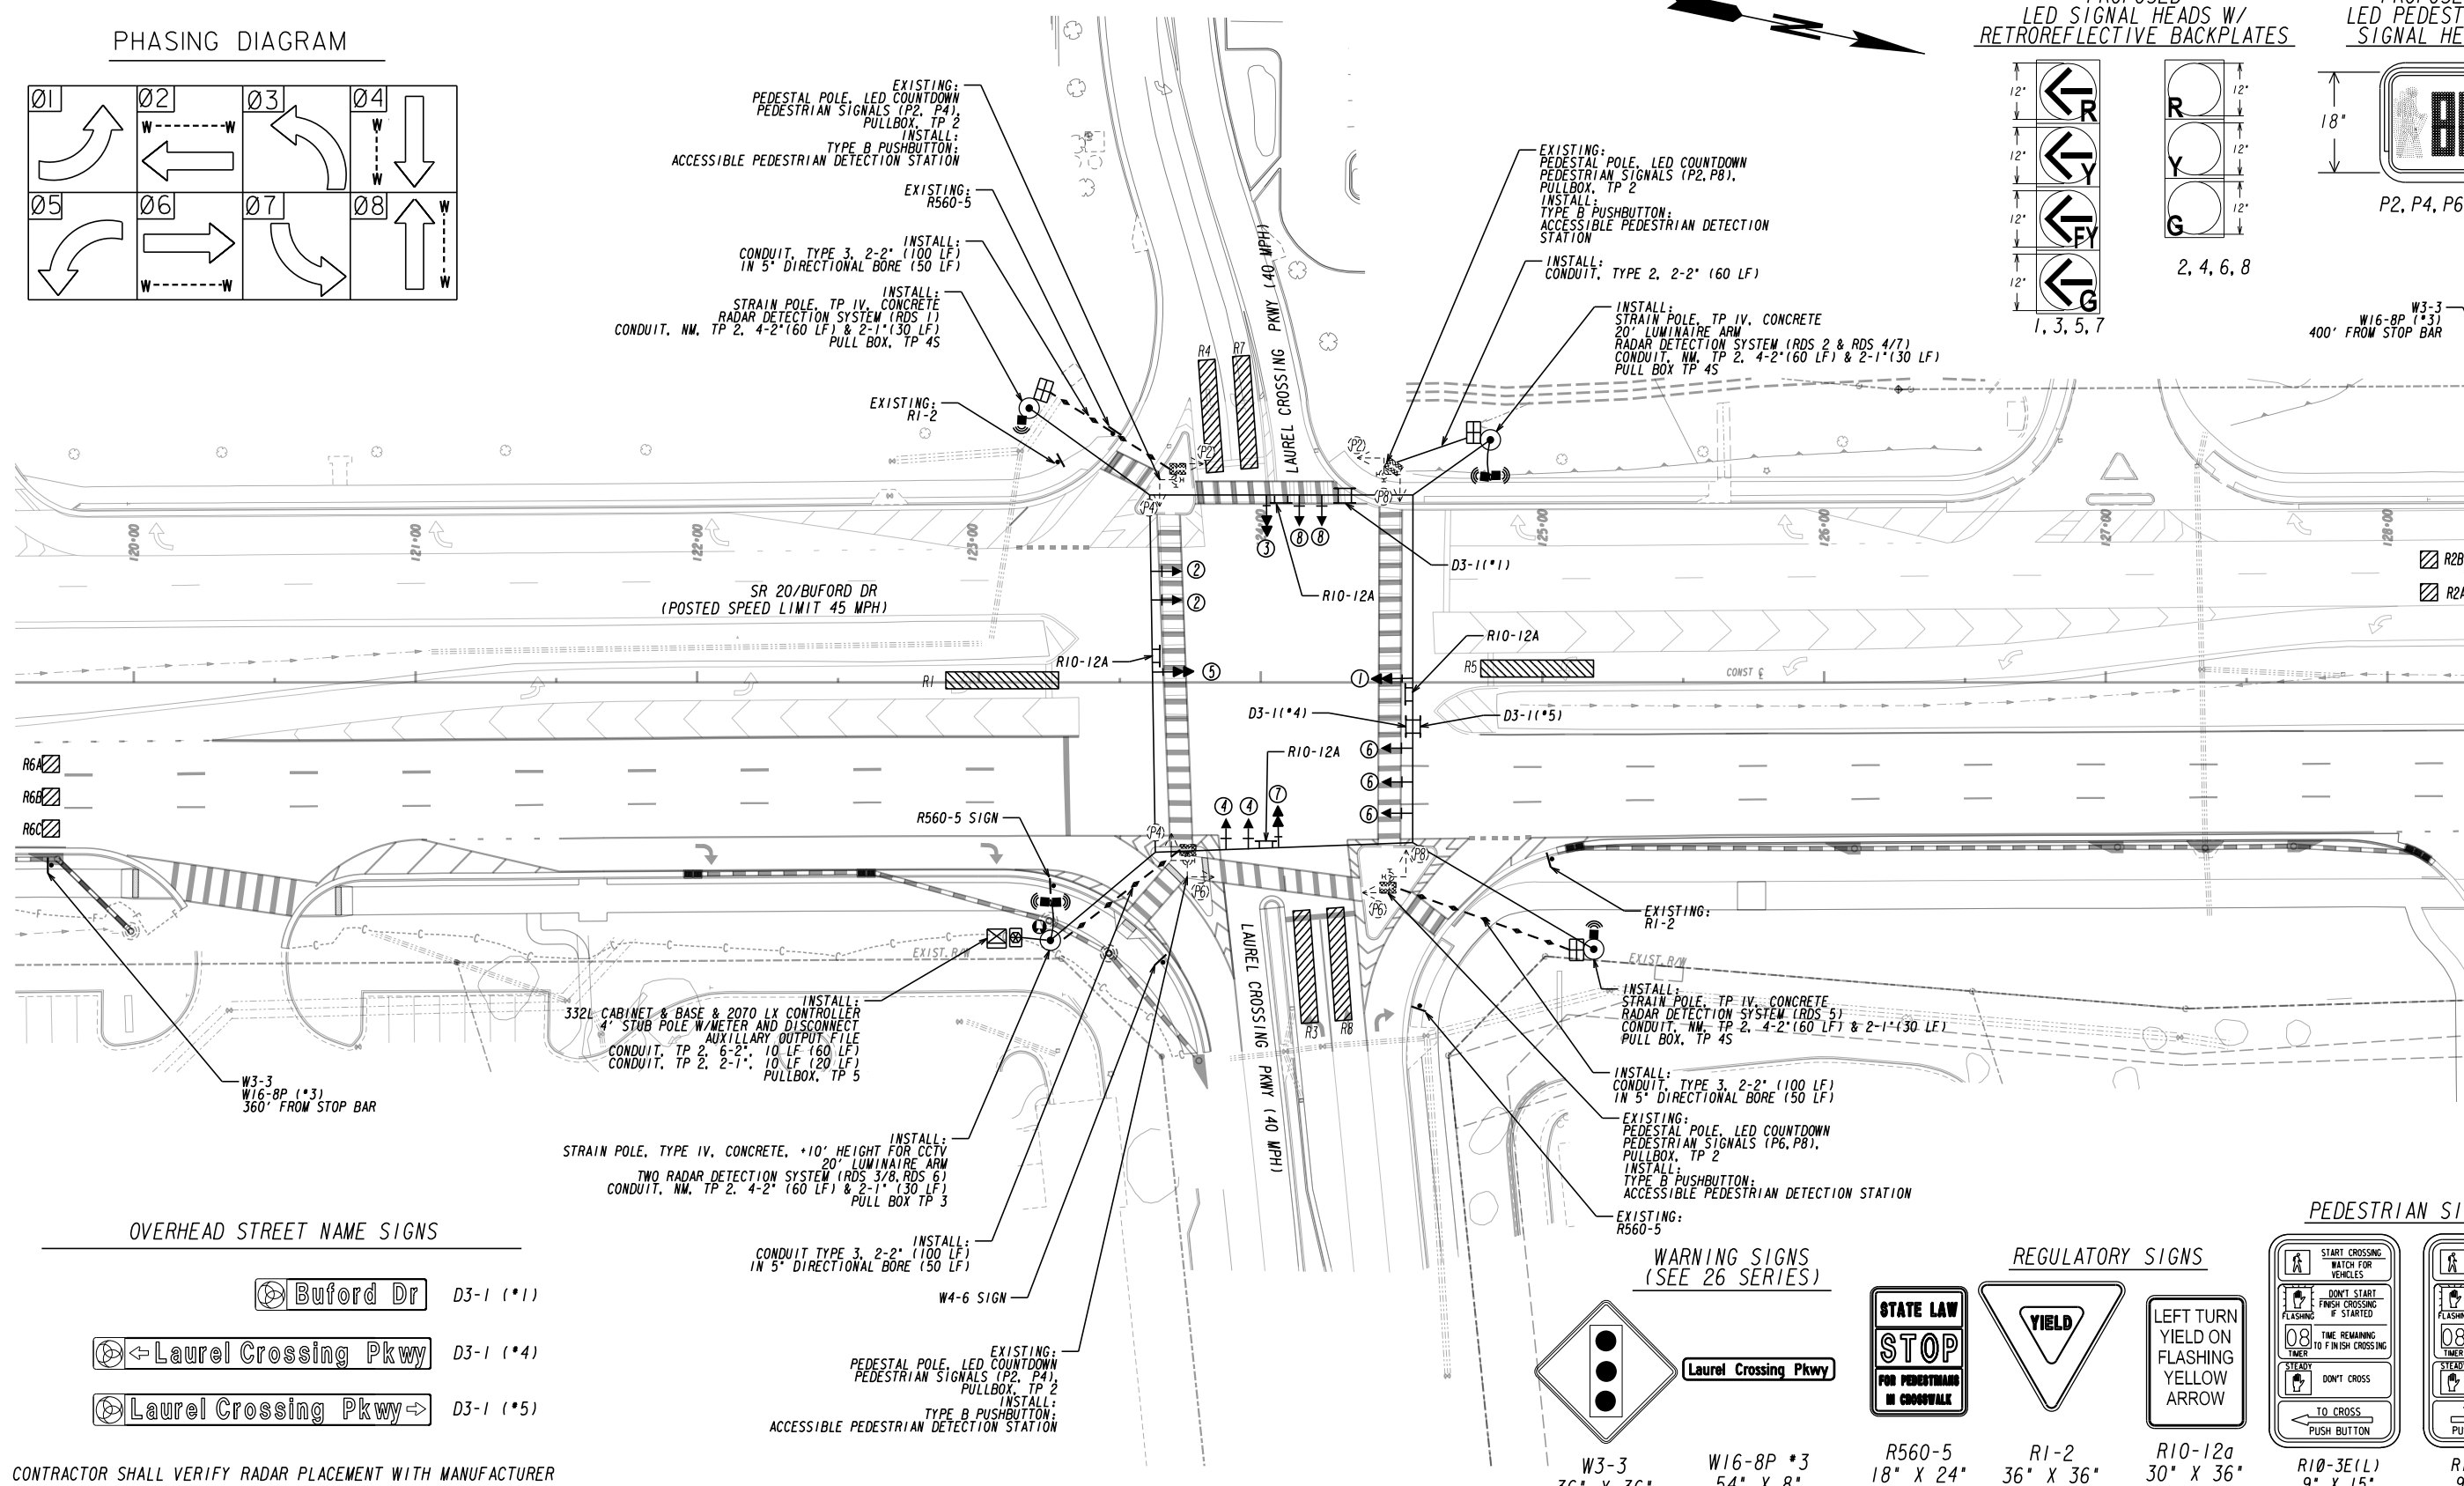


### OVERHEAD STREET NAME SIGNS

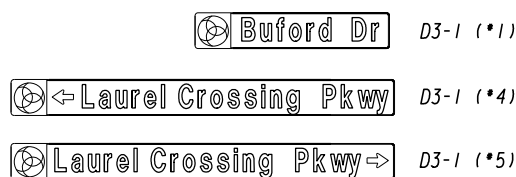


NOTE: CONTRACTOR SHALL VERIFY RADAR PLACEMENT WITH MANUFACTURER

### SIGNAL LEGEND

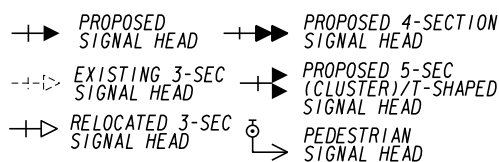

### DETECTION LEGEND

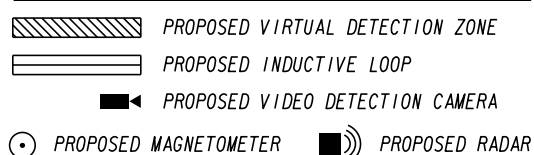

## Michael Baker

### INTERNATIONAL

3930 East Jones Bridge Road, Suite 220  
 Peachtree Corners, GA 30092  
 Phone: (770) 263-9118

ADDENDUM #1

APPROVED

2026.03.23  
 09:42:48-04'00'

TMC  
 Georgia D.O.T.

GWINNETT COUNTY  
 DEPARTMENT OF TRANSPORTATION


OFFICE: PROGRAM DELIVERY

### TRAFFIC SIGNAL INSTALLATION #3

GCDOT #766

SR 20 @ LAUREL CROSSING PKWY

DRAWING No. 27-0006



LIST OF MATERIALS (FOR INFORMATION ONLY - CONTRACTOR REQUIRED TO VERIFY)	UNIT	QUANTITY
<b>CONTROLLER CABINET ASSEMBLIES</b>		
B. CONTROLLER UNIT, MODEL 2070LX	EA	1
D. CABINET ASSEMBLY, MODEL 332L	EA	1
F. SWITCH PACK (Load Switch)	EA	12
G. DC ISOLATOR	EA	1
K. 2018 SIGNAL MONITOR, KCLIP W/EXTENDED FEATURES	EA	1
M. AUXILLARY OUTPUT FILE	EA	1
332L PREFABRICATED CONTROLLER CABINET W/ EXTENDED BASE	EA	1
PED LEAD-IN WIRE (SHIELDED, TWSTED/1000 FT); 3 PAIR, 18 AWG	REEL	1
SIGNAL CABLE (14 AWG); 7 CONDUCTOR, PER 1000 FT.	REEL	2
3-SECTION, 12" SIGNAL HEAD LED - BLACK HOUSING w/ BLACK FRONT, PLASTIC, INCANDESCENT LOOK, CLEAR LENSES	EA	9
4-SECTION, 12" SIGNAL HEAD LED- BLACK HOUSING w/ BLACK FRONT, PLASTIC, INCANDESCENT LOOK	EA	4
ACCESSIBLE PEDESTRIAN PUSHBUTTONS STATIONS (TYPE B), w/BUTTONS and SIGNS, BLACK:		
9" x 15", R10-3e, (L)eft or (R)ight, Countdown	EA	8
BACK PLATE FOR ONE-WAY, 3-SECTION, 12" SIGNAL HEAD, ABS PLASTIC, BLACK w/ RETROREFLECTIVE STRIP	EA	9
BACK PLATE FOR ONE-WAY, 4-SECTION T-SHAPE, 12" SIGNAL HEAD, ALUMINUM, BLACK w/ RETROREFLECTIVE STRIP	EA	4
HARDWARE FOR SPANWIRE MOUNTING (3 or 4 Section Signals)	EA	13
CONDUIT, 1"	LF	140
CONDUIT, 2"	LF	360
R10-5A, LEFT TURN YIELD ON FLASHING YELLOW SIGN	EA	4
MISCELLANEOUS MATERIALS NEEDED TO COMPLETE INSTALLATION	LUMP	LUMP

PAY ITEMS (FOR INFORMATION ONLY - CONTRACTOR REQUIRED TO VERIFY)		UNIT	QUANTITY
647-2130	DIRECTIONAL BORE, 5"	LF	150
636-1041	HIGHWAY SIGNS , TP 2 MATL, REFL SHEETING, TP 9	SF	70
647-2140	PULL BOX, PB-4S	EA	3
647-2150	PULL BOX, PB-5	EA	1
639-4004	CONCRETE STRAIN POLE, TP IV	EA	2
639-4004	CONCRETE STRAIN POLE, TP IV, W/LUMINAIRE	EA	1
639-4004	CONCRETE STRAIN POLE, TP IV, W/LUMINAIRE, WITH 10' ADDITIONAL HEIGHT	EA	1
937-6000	MICROWAVE RADAR DETECTION ASSEMBLY	EA	6
647-1000	TRAFFIC SIGNAL INSTALLATION #3	LS	1
682-6233	CONDUIT, NONMETAL, TP 3, 2 IN	LF	300

**Michael Baker**

**INTERNATIONAL**

3930 East Jones Bridge Road, Suite 220  
Peachtree Corners, GA 30092  
Phone: (770) 263-9118

REVISION DATES

ADDENDUM #1		

GWINNETT COUNTY  
DEPARTMENT OF TRANSPORTATION  
OFFICE: PROGRAM DELIVERY


**TRAFFIC SIGNAL INSTALLATION #3**

GCDOT \*766


SR 20 @ LAUREL CROSSING PKWY

DRAWING No.  
**27-0007**



PHASING DIAGRAM

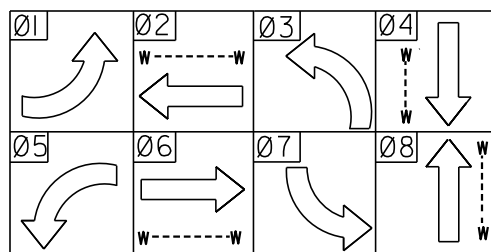

PROPOSED LED SIGNAL HEADS W/ RETROREFLECTIVE BACKPLATES

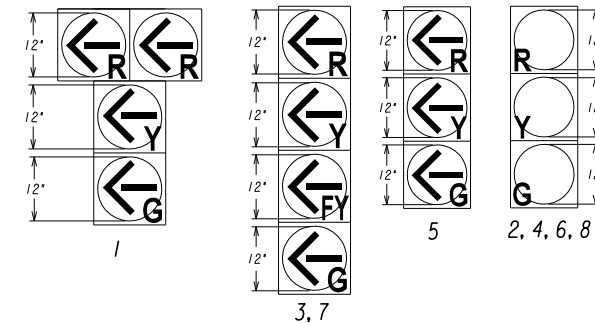


PROPOSED LED PEDESTRIAN SIGNAL HEADS

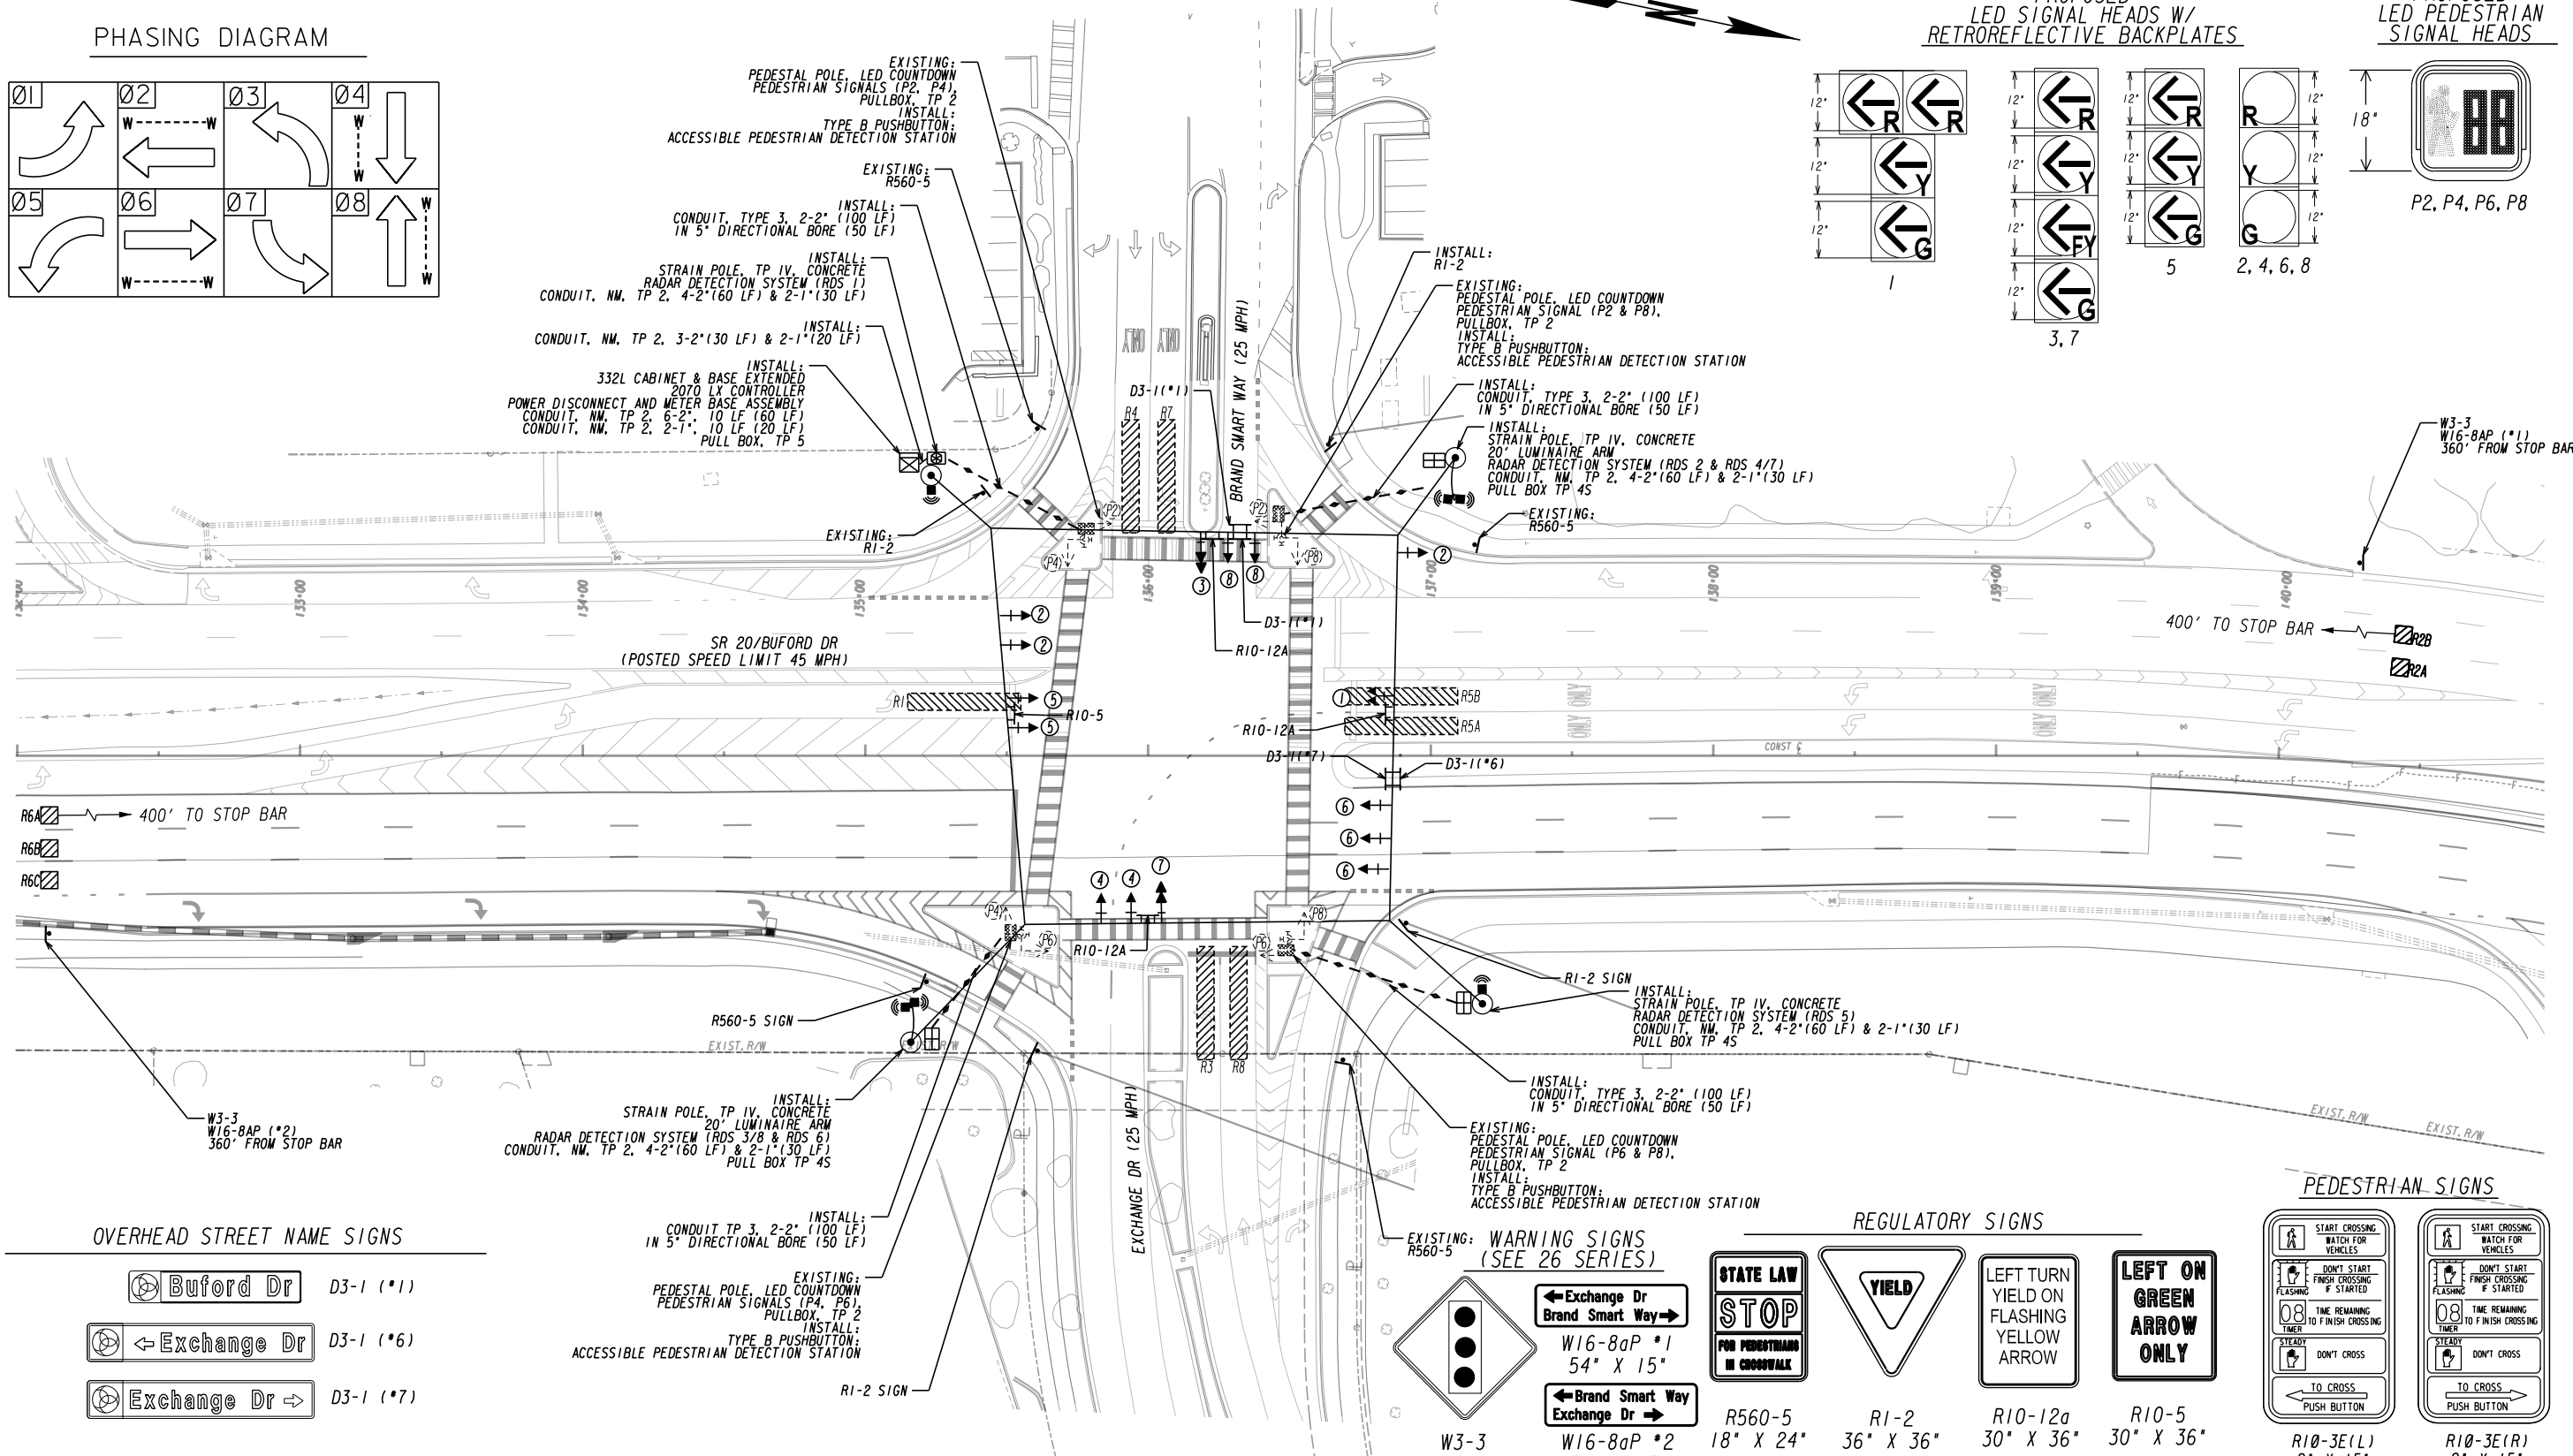


OVERHEAD STREET NAME SIGNS



REGULATORY SIGNS

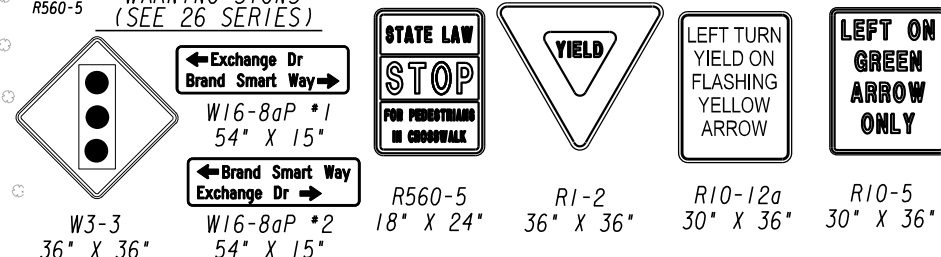


PEDESTRIAN SIGNS

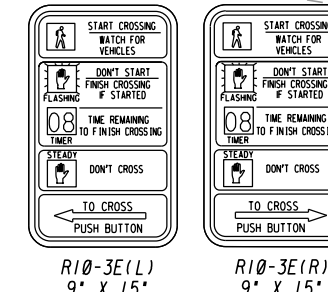


NOTE: CONTRACTOR SHALL VERIFY RADAR PLACEMENT WITH MANUFACTURER

SIGNAL LEGEND

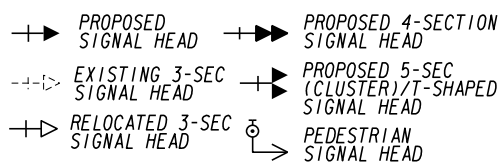

DETECTION LEGEND

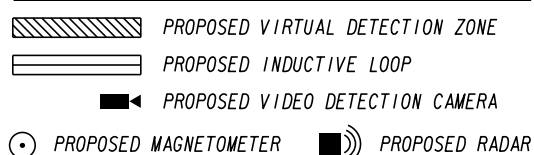

Michael Baker INTERNATIONAL

3930 East Jones Bridge Road, Suite 220 Peachtree Corners, GA 30092 Phone: (770) 263-9118

ADDENDUM #1

APPROVED

2026.03.23 09:54:44-04'00'

TMC Georgia D.O.T.


GWINNETT COUNTY DEPARTMENT OF TRANSPORTATION

OFFICE: PROGRAM DELIVERY

TRAFFIC SIGNAL INSTALLATION #4

GCDOT #500

SR 20 @ BRAND SMART WAY



DRAWING No. 27-0008

LIST OF MATERIALS (FOR INFORMATION ONLY - CONTRACTOR REQUIRED TO VERIFY)	UNIT	QUANTITY
-----		
CONTROLLER CABINET ASSEMBLIES		
B. CONTROLLER UNIT, MODEL 2070LX	EA	1
D. CABINET ASSEMBLY, MODEL 332L	EA	1
F. SWITCH PACK (Load Switch)	EA	12
G. DC ISOLATOR	EA	1
K. 2018 SIGNAL K-CLIP WITH EXTENDED FEATURES	EA	1
M. AUXILLARY OUTPUT FILE	EA	1
332L PREFABRICATED CONTROLLER CABINET W/ EXTENDED BASE	EA	1
PED LEAD-IN WIRE (SHIELDED, TWSTED/1000 FT); 3 PAIR, 18 AWG	REEL	1
SIGNAL CABLE (14 AWG); 7 CONDUCTOR, PER 1000 FT.	REEL	2
3-SECTION, 12" SIGNAL HEAD LED - BLACK HOUSING w/ BLACK FRONT, PLASTIC, INCANDESCENT LOOK, CLEAR LENSES	EA	11
4-SECTION, 12" SIGNAL HEAD LED- BLACK HOUSING w/ BLACK FRONT, PLASTIC, INCANDESCENT LOOK	EA	3
ACCESSIBLE PEDESTRIAN PUSHBUTTONS STATIONS (TYPE B), w/BUTTONS and SIGNS, BLACK:		
9" x 15", R10-3e, (L)eft or (R)ight, Countdown	EA	8
BACK PLATE FOR ONE-WAY, 3-SECTION, 12" SIGNAL HEAD, ABS PLASTIC, BLACK w/ RETROREFLECTIVE STRIP	EA	11
BACK PLATE FOR ONE-WAY, 4-SECTION OWL HEAD, 12" SIGNAL HEAD, ABS PLASTIC, BLACK w/ RETROREFLECTIVE STRIP	EA	3
HARDWARE FOR SPANWIRE MOUNTING (3 or 4 Section Signals)	EA	14
CONDUIT, 1"	LF	160
CONDUIT, 2"	LF	330
R10-5 LEFT ON GREEN ARROW ONLY	EA	1
R10-5A, LEFT TURN YIELD ON FLASHING YELLOW SIGN	EA	3
MISCELLANEOUS MATERIALS NEEDED TO COMPLETE INSTALLATION	LUMP	LUMP

PAY ITEMS (FOR INFORMATION ONLY - CONTRACTOR REQUIRED TO VERIFY)		UNIT	100
-----			
682-9950	DIRECTIONAL BORE, 5"	LF	200
636-1041	HIGHWAY SIGNS , TP 2 MATL, REFL SHEETING, TP 9	SF	62
647-2140	PULL BOX, PB-4S	EA	4
647-2150	PULL BOX, PB-5	EA	1
639-4004	CONCRETE STRAIN POLE, TP IV	EA	2
639-4004	CONCRETE STRAIN POLE, TP IV, W/LUMINAIRE ARM	EA	2
937-6000	MICROWAVE RADAR DETECTION ASSEMBLY	EA	6
647-1000	TRAFFIC SIGNAL INSTALLATION #4	LS	1
682-6233	CONDUIT, NONMETAL, TP 3, 2 IN	LF	400

**Michael Baker**

**INTERNATIONAL**

3930 East Jones Bridge Road, Suite 220  
Peachtree Corners, GA 30092  
Phone: (770) 263-9118

REVISION DATES

ADDENDUM #1		


GWINNETT COUNTY  
DEPARTMENT OF TRANSPORTATION  
OFFICE: PROGRAM DELIVERY

**TRAFFIC SIGNAL INSTALLATION #4**


GCDOT \*500

SR 20 @ BRAND SMART WAY


DRAWING No.  
**27-0009**

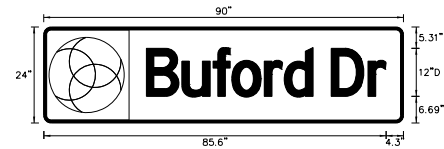


D3-1 #1 (7 EA)

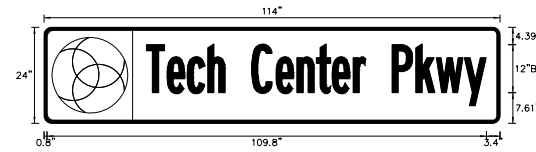


D3-1 #2 (2 EA)

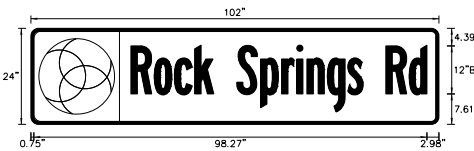


D3-1 #3 (2 EA)

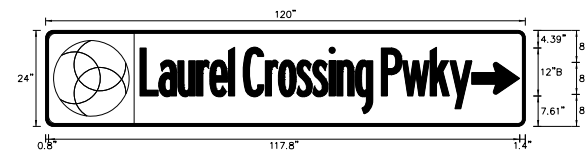


D3-1 #4 (1 EA)

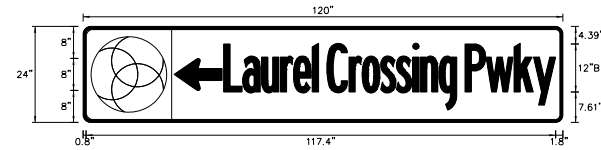


D3-1 #5 (1 EA)

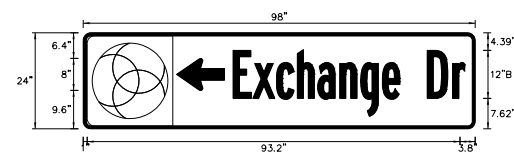


D3-1 #6 (1 EA)

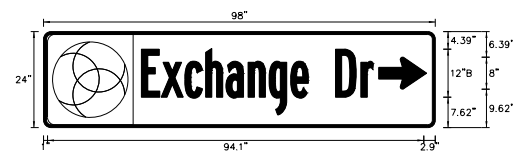


D3-1 #7 (1 EA)

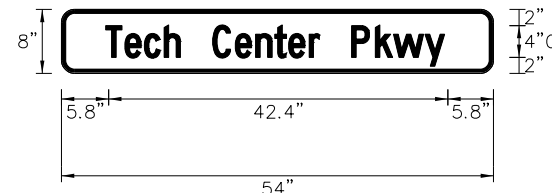


W16-8P #1 (2 EA)

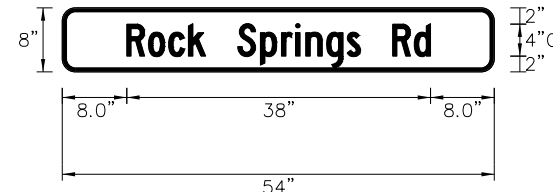


W16-8P #2 (2 EA)

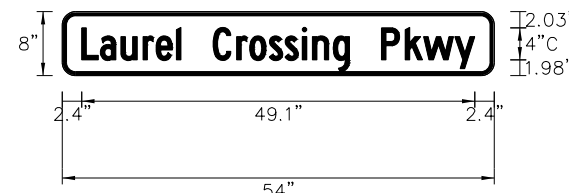

W16-8P #3 (2 EA)

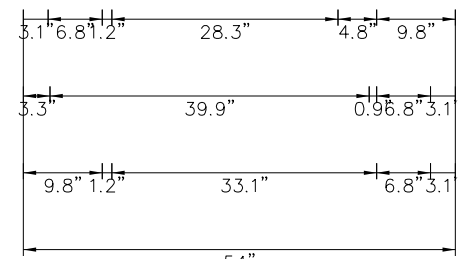


W16-8AP #1 (2 EA)

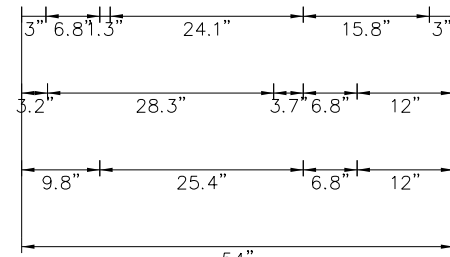

W16-8AP #2 (2 EA)

D-SPEC SIGNS SPANWIRE BRACKET ASSEMBLY

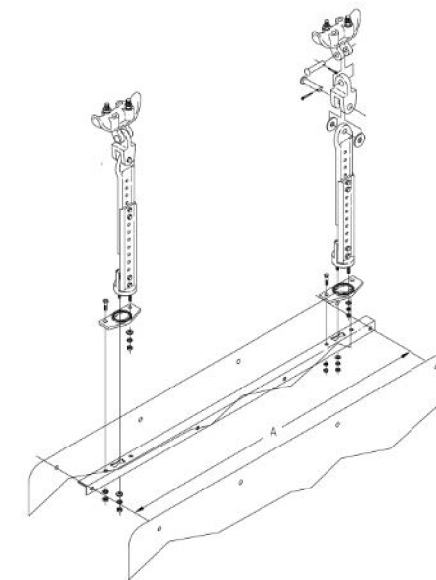

1. MINIMUM OF TWO HANGERS PER D-SPEC SIGN.
2. ALL LETTERS TO BE 8" UPPERCASE & 8" LOWERCASE SERIES "D". ALL ARROWS TO BE 6" TALL & 9" LONG.
3. BORDER SHALL BE 1/2". RADIUS SHALL BE 1 1/2". SIGN PANELS SHALL BE FABRICATED OF ONE CONTINUOUS PIECE OF ALUMINUM. SPlicing OF ALUMINUM PANELS SHALL NOT BE PERMITTED.
4. ALL SIGNS SHALL BE WHITE REFLECTORIZED LEGEND AND BORDER ON STANDARD INTERSTATE GREEN REFLECTORIZED BACKGROUND.

SPECIFICATION FOR OVER HEAD STREET NAME SIGN WITH LOGO

Gwinnett County D.O.T.  
Layout for over head street name sign with logo



Sign shall be 18" tall by 60" - 120" long as needed. (not to exceed 120").  
Sign shall be white text on a traffic green background with white borders and full color logo.  
Material shall be 3M reflective Diamond Grade DG3 4000 series, or equivalent type XI material or better.  
Letters shall be Highway Gothic D Font, at 8" in height.  
Logo shall be in full color with a diameter of 15".  
The Contractor shall contact Gwinnett County Department of Transportation's Sign Shop @ 678-639-8800 for an electronic file of the logo.

**Michael Baker**

**INTERNATIONAL**

3930 East Jones Bridge Road, Suite 220  
Peachtree Corners, GA 30092  
Phone: (770) 263-9118

REVISION DATES

ADDENDUM #1		

GWINNETT COUNTY  
DEPARTMENT OF TRANSPORTATION  
OFFICE: PROGRAM DELIVERY  
**OVERHEAD SIGN DETAILS**

SR 20 NB WIDENING

DRAWING No.  
**27-0010**